

The JUNO logo consists of the word "JUNO" in a bold, white, sans-serif font, centered within a solid red square.

JUNO

PAINT MANUFACTURERS SINCE 1927

The background is a collage of various images and abstract shapes. On the left, there's a circular inset showing an industrial interior with a staircase and overhead pipes. On the right, there's a circular inset showing a modern building with large windows. The bottom left features a large, curved, red-tinted image of a modern interior space with a curved wall and ceiling. The bottom right has a teal circular shape. The central text is contained within a white rectangular box.

**2023
2024**

Product Catalogue

Professional and
decorative paints
and coatings.

DECORATION
CONSTRUCTION
RESTORATION

Due to limitations with the printing process, colour swatches and images are for inspiration purposes only. The colour swatches do not exactly match the paint colour in the can. Colour chips in product colour cards will be much more accurate, but slight variations between batches of paint may occur.

Where more than one tin of paint is required, check that batch numbers are identical, and if not, intermix before use.

Please ensure a tester is used on the actual surface to be painted before decoration.

This catalogue and the images and information herein is the property of JUNO and may not be copied or reproduced without the express authorisation of JUNO. Unauthorised reproduction is protected by law. Any consultation and authorisation to use this catalogue must be sent to JUNO (export@juno.es).

CONTENTS

JUNO PAINTS 4 - 5

EXTERIOR

Exterior house paint and masonry surfaces ..	7
High Build masonry coatings	9
Acrylic Renders	10
Elastomeric waterproofing	11
Silicate and Pliolite coatings	12
Exterior sealers and primers	13
Hydrophobic Sealer	13

INTERIOR

Interior emulsions	15
Trade emulsions ideal for spraying	16
AENOR Certified paints	17
Anti-bacterial/Hygienic paint.....	17
Decorative tinting bases	18
Monocoat coloured emulsions	18
Sealers	19
Stain Blocks	19

PAINTS POR COATINGS

Single-pack floor paint	21
Two-pack floor paints	21
High-build two-pack epoxy systems (100% solids)	22
Pool/Milking Parlours/Traffic marking	23
Line marking for grass and turf	23

TRIM PAINTS

Solvent-based enamels	25
Water-based enamels.....	27
Decorative tinting bases	27
Industrial tinting bases.....	28
Adhesion and anti-corrosive primers	29
Wood primers and undercoats	29

WOOD COATINGS

Water-based wood coating and varnish	31
Solvent-based wood coating and varnish.....	32

SUNDRIES

Fillers & Caulk	34
Colourants, Paint Stripper, additives, etc.	35
Thinners & Cleaners	37
Colour charts & Fan Decks	37

SUPPLEMENTARY PRODUCTS

Special exterior coatings	39
Special interior coatings	40
Water-based 2-pack Polyurethane	41
Sealers and primers	41
Thinners	41
Varnish	42
Colourants for tinting system	42

MARKETED PRODUCTS

Intumescent paints	44
Liquid polyurethane membrane	44



1 Research & Development LABORATORY

Technical support: direct and efficient enquiry response.

Personalized solutions: customized products, paint system advice, technical reports and warranties.

Investment in the ultimate high-tech technology (infrared, rheometry, etc.).

Continuous quality audit: raw material control, colour control, etc.

2 Innovation and Quality SETTING THE PACE



New ETICS System
JUNOTherm®



Achieve C5-High
anti-corrosion
protection
with 140 micron
DFT only



Pavimyc HB 2C
New high-build
epoxy system
(100% solids)



3 **Supporting and following up on professionals**

PROJECT AND PRESCRIPTION DEPARTMENT

Personalized solutions and professional advice to all professionals who require back-up (painters, contractors, architects, quantity surveyors, construction companies etc).

- **Highly qualified team specialists** in CONSTRUCTION, ETICS, FLOORING and INDUSTRIAL COATINGS.

4 **Environmental Care**

RECYCLED PACKAGING



At JUNO we are committed to environmental responsibility, using fewer and fewer resources to manufacture our products:

- ✓ Packaging made of recycled plastic (Grey colour).
- ✓ Same attributes.
- ✓ Same product.



EXTERIOR

- ▮ Exterior house paint and masonry surfaces
- ▮ High Build Masonry coatings
- ▮ Acrylic Renders
- ▮ Elastomeric waterproofing
- ▮ Specialty Exterior Products
- ▮ Exterior sealers & primers
- ▮ Water repellent masonry sealer

Exterior house paint and masonry surfaces

NOVOKRIL

Satin finish



Matt finish



JUNO Façades Colour CARD
JUNOMATIC Tinting System

Premium performance microporous and breathable masonry coating. With anti-mould protection.

100% pure acrylic resin, formulated with advanced technology pure acrylic copolymers for great flexibility and adhesion that make it resistant to rain water and permeable to water vapour, allowing moisture and air to be released.

For exterior use.

Cleaning and dilution with water.



Recommended for decorating and waterproofing masonry surfaces such as cement and concrete materials (façades, walls, patios, etc.) and any surface that requires maximum resistance to atmospheric agents and humid environments.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Pull-off adhesion - Permeability to rain water and water vapour - Anti-carbonation - Fire retardant to B-s1,d0 standard.



Satin finish

15 l

4 l

- ☐ White base/P (62.150)
- ☒ Medium base/D (62.169)
- ☒ Deep base/TR (62.170)

Matt finish

15 l

4 l

- ☐ White base/P (62.195)
- ☒ Medium base/D (62.145)
- ☒ Deep base/TR (62.146)

JUNOKRIL

Satin finish



Matt finish



JUNO Façades Colour CARD
JUNOKRIL Colour CARD
JUNOMATIC Tinting System

High performance microporous and breathable paint. With anti-mould protection.

Formulated with acrylic-vinyl copolymers (satin finish) or pure acrylic resins (matt finish) with anti-carbonation properties. Resistant to rain water and permeable to water vapours, allowing moisture and air to be released. Wide range of tinting bases for optimal performance, colour stability and opacity.

For exterior use.



Recommended for decorating and waterproofing masonry surfaces such as cement and concrete materials (façades, walls, patios, etc.) and any surface that requires maximum resistance to atmospheric agents and humid environments.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - CE Certified: Direct pull-off adhesion - Permeability to rain water and water vapour - Anti-carbonation - Fire retardant to B-s1,d0 standard.



! Satin finish

15 l

4 l

750 ml

- ☐ White base/P (61.000)
- ☒ Black* (61.001)
- ☒ Ochre* (61.065)
- ☒ Turkish red* (61.070)
- ☒ Txoko brown* (61.071)
- ☒ Pelota court green* (61.052)
- ☒ Blue* (61.012)
- ☒ Red* (61.016)
- ☒ Yellow* (61.025)
- ☒ Medium base/D (61.195)
- ☒ Deep base/TR (61.196)

Matt finish

15 l


4 l

750 ml

- ☐ White base/P (60.500)
- ☒ Medium base/D (60.501)
- ☒ Deep base/TR (60.502)
- ☒ Yellow base/GL* (88.895)
- ☒ Red base/ RD* (88.896)


BIKRIL
Satin finish

Silk finish

Matt finish

High quality microporous and breathable water-based paint, special for decoration. With anti-mould protection.

Formulated with high quality resins, with anti-carbonation properties. Quick drying formulation resistant to rain water and permeable to water vapour allowing moisture and air to be released. For exterior and interior use.

Cleaning and dilution with water.


Satin finish
☐ White base/P (60.100)

☒ Medium base/D (60.101)

☒ Deep base/TR (60.102)

Silk finish
☐ White base/P (60.400)

☒ Medium base/D (60.401)

☒ Deep base/TR (60.402)

Matt finish
☐ White base/P (60.300)

☒ Medium base/D (60.301)

☒ Deep base/TR (60.302)

Recommended for decorating and waterproofing masonry surfaces such as cement and concrete materials. Also ideal for kitchens, bathrooms and other areas exposed to contact with water, humidity, etc.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - CE (only matt finish): Direct pull-off adhesion - Permeability to rain water and water vapour - Anti-carbonation - Fire retardant to B-s1,d0 standard.



15 l 4 l 750 ml

J-300
High Satin finish

High satin finish emulsion. With anti-mould protection.

Formulated in dispersion using Veova vinyl resins.

For exterior and interior use.

Cleaning and dilution with water.


☐ White / Satin finish (71.055)

Recommended for general use in construction on plaster, cement surfaces, etc. Good whiteness, hiding power and easy application.

Resistant to wet rubbing and scuffing and permeable to water vapour, allowing moisture and air to be released.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.



15 l 4 l

J-3000
Medium Satin finish

Medium satin finish emulsion. With anti-mould protection.

Formulated with resins in aqueous dispersion.

For exterior and interior use.

Cleaning and dilution with water.


☐ White / Satin finish (71.063)

Recommended for general use in construction on plaster, cement surfaces, etc. Good whiteness, hiding power and easy application.

Resistant to wet rubbing and scuffing and permeable to water vapour, allowing moisture and air to be released.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.



15 l 4 l

A-100 STIMAX
Matt finish

High performance water-based acrylic paint. With anti-mould protection.

Formulated with 100% acrylic resins in aqueous dispersion, titanium dioxide and extenders. For exterior and interior use. Cleaning and dilution with water.


☐ White / Matt finish (62.400)

Recommended for decorating façades, walls and for interiors and spaces where a quality matt finish, resistant to water and permeable to water vapour is required, allowing moisture and air to be released.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.



15 l 4 l 750 ml

A-5000
Matt finish

High performance exterior trade masonry paint. With anti-mould protection.

Formulated with styrene-acrylic resins in aqueous dispersion. Excellent value for money. For exterior and interior use. Cleaning and dilution with water.


☐ White / Matt finish (62.590)

Recommended for decorating façades, patios, warehouses and places where an optimal finish at an economical price is required.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.



15 l 4 l

High Build Masonry coatings

SUPER JUNOREV

Matt finish / Smooth



JUNO Façades Colour CARD

JUNOMATIC Tinting System

Premium high build masonry coating. With anti-mould protection.

Formulated with the highest quality acrylic copolymers in aqueous dispersion providing excellent outdoor performance. Super Junorev is microporous and breathable allowing moisture and air to be released.

For exterior and interior use.

Cleaning and dilution with water.

Recommended for protecting and decorating mineral surfaces, including renders and pebbledash, in need of protection from rain, humidity, micro-organisms and carbonation. Super Junorev actively resists peeling and flaking.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - CE: Direct pull-off adhesion - Permeability to rain water and water vapour - Anti-carbonation - Fire retardant to B-s1,d0 standard.



ADHESION

PERMEABILITY

ANTI-CARBONATION

FIRE RETARDANT
B-s1,d0

Smooth finish

15 l

4 l

☐ White base/P (65.101)

☒ Medium base/D (65.215)

☒ Deep base/TR (65.216)

JUNOREV

Matt finish / Smooth



Matt finish / Textured



JUNO Façades Colour CARD

JUNOREV Colour CARD

100% acrylic high build masonry coating. With anti-mould protection.

Formulated with acrylic resins in aqueous dispersion with excellent mechanical properties. Junorev is both microporous and breathable allowing moisture and air to be released.

For exterior and interior use.

Cleaning and dilution with water.

Recommended for protecting and decorating mineral surfaces, including renders and pebbledash, in need of protection from rain, humidity, micro-organisms and carbonation. Junorev actively resists peeling and flaking.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - CE (smooth finish): Direct pull-off adhesion - Anti-carbonation - Light Stability - Permeability to rain water and water vapour - Fire retardant to B-s1,d0 standard.



ADHESION

ANTI-CARBONATION

LIGHT STABILITY

PERMEABILITY

FIRE RETARDANT
B-s1,d0

Smooth finish

15 l

4 l

☐ White base/P (65.500)

☒ Grey* (65.502)

☒ Clay* (65.515)

☒ Sand* (65.521)

☒ Cream* (65.522)

☒ Wheat yellow* (65.530)

☒ Mustard yellow* (65.550)

☒ Brick* (65.547)

☒ Terracotta* (65.548)

☒ Light beige* (65.560)

☒ Turkish red* (65.570)

☒ Tile* (65.575)

☒ Pelota court green* (65.552)

☒ Pastel* (65.580)

☒ Cinnamon* (65.582)

☒ Hazelnut* (65.584)

☒ Dune* (65.585)

Textured finish

15 l

4 l

☐ White base/P (64.500)

LUNA

Matt finish



BIKRIL/LUNA Colour CARD

JUNOMATIC Tinting System

High build masonry coating with anti-mould protection.

Formulated with styrene-acrylic resins in aqueous dispersion with excellent mechanical properties and permeable to water vapour, allowing moisture and air to be released.

For exterior and interior use.

Cleaning and dilution with water.

Recommended for the protection and decoration of mineral surfaces (cement, concrete, pebbledash or renders, etc.). Ideal for correcting finishing faults and touch-ups on surfaces, providing a high opacity decorative finish.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.











FIRE RETARDANT
B-s1,d0

☐ White base/P (67.500)

☒ Deep base/TR (67.501)

15 l

Acrylic Renders

<p>New</p> <p>EVOKRIL BASE</p> <p>Matt</p>  	<p>Water-based pigmented acrylic copolymer primer base coating for the EVOKRIL decorative/protective render system, ETICS system - JUNOTerm® and other masonry systems.</p> <p>Formulated based on water-based acrylic copolymers to consolidate, waterproof and even out the surface before applying the render. Fine-grained. Great penetrating power.</p> <p>Excellent waterproofing and breathability.</p> <p>For interior and exterior use.</p> <p>Cleaning and thinning with water.</p>	<p>Recommended as a primer on surfaces such as paint, cement, fibre cement, plaster, concrete, non-waterproof surfaces, etc. for EVOKRIL render system and other masonry coatings.</p> <p>Improves adhesion and uniformity of successive paint coats.</p> <p>22 kg</p>
<p>New</p> <p>EVOKRIL 0.7</p> <p>Matt</p>  	<p>Acrylic render for waterproofing and decorating facades. (0.7 mm grain size) With anti-mould protection.</p> <p>Formulated based on acrylic copolymers and selected fillers to achieve a variety of decorative finishes and textures: dropfinish, floated, roughcast and scraped finish.</p> <p>Great elasticity, adhesion and hardness.</p> <p>Excellent waterproofing capacity and breathability.</p> <p>For interior and exterior use.</p> <p>Cleaning and thinning with water.</p>	<p>Recommended to achieve decorative finishes on facades. For universal application on non-waterproof concrete, cement, plaster, fiber cement, paint, etc.</p> <p>Finishing mortar for ETICS JUNOTerm® system.</p> <p><i>APPROVAL CERTIFICATES: CE certified for Direct traction adhesion - Permeability to rainwater and water vapours.</i></p> <div>  <div>ADHESION</div> <div>PERMEABILITY</div> </div> <p>25 kg</p>
<p>New</p> <p>EVOKRIL 1.5</p> <p>Matt</p>  	<p>Acrylic render for waterproofing and decorating facades. (1.5 mm grain size) With anti-mould protection.</p> <p>Formulated based on acrylic copolymers and selected fillers to achieve a variety of decorative finishes and textures: dropfinish, floated, roughcast and scraped finish.</p> <p>Great elasticity, adhesion and hardness.</p> <p>Excellent waterproofing capacity and breathability.</p> <p>For interior and exterior use.</p> <p>Cleaning and thinning with water.</p>	<p>Recommended to achieve decorative finishes on facades. For universal application on non-waterproof concrete, cement, plaster, fiber cement, paint, etc.</p> <p>Finishing mortar for ETICS JUNOTerm® system.</p> <p><i>APPROVAL CERTIFICATES: CE certified for Direct traction adhesion - Permeability to rainwater and water vapours.</i></p> <div>  <div>ADHESION</div> <div>PERMEABILITY</div> </div> <p>25 kg</p>

EVOKRIL System

BASE COAT AND ACRYLIC RENDER FOR FAÇADE WATERPROOFING AND DECORATION



EVOKRIL Primer

Pigmented acrylic water-based primer

- Promotes adhesion for render system
- Evens out surface absorption levels

EVOKRIL 0.7 / 1.5

Acrylic render with anti-mould protection

- Flexible and elastomeric
- Excellent permeability and breathability

-  **Hides imperfections**
-  **Achieves variety of finishes**
-  **Wide range of colours**

Elastomeric waterproofing

ELASTIFLEX PLUS

Semi-matt finish



Water-based elastomeric paint with maximum elasticity and extraordinary crack resistance (certified to withstand cracks up to 2 mm while able to bridge cracks up to 4 mm). With anti-mould protection.

Formulated with photocrosslinkable acrylic resins with anti-carbonation protection and excellent mechanical and waterproofing properties. Wide range of permanent elasticity (from -30°C to 60°C). Improves surface energy efficiency.

For exterior use.

Cleaning and dilution with water.



Recommended for vertical and horizontal waterproofing on façades, terraces and roofing without cracks or with cracks up to 4 mm, provided there is a run-off slope above 1%. Also particularly suitable for eliminating moisture problems in hard to reach places that are not exposed to continuous traffic.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Direct pull-off adhesion - Permeability to rain water and water vapour - Anti-carbonation - Transmission of liquid water and water vapour - Class A5 crack resistance - Fire retardant to B-s1,d0 standard.

ADHESION	PERMEABILITY	ANTI-CARBONATION
TRANSMISSION	RESISTANCE	SOLAR REFLECTIVE
		FIRE RETARDANT B-s1,d0

15 l

4 l

☐ White base/P (62.767)

ELASTIFLEX

Semi-matt finish



Water-based elastomeric paint with maximum elasticity and extraordinary crack resistance (certified to withstand cracks up to 0,9 mm while able to bridge cracks up to 1,5 mm). With anti-mould protection.

Formulated with photocrosslinkable acrylic resins with anti-carbonation protection and excellent mechanical and waterproofing properties. Wide range of permanent elasticity (from -30°C to 60°C). Improves surface energy efficiency.

For exterior use.

Cleaning and dilution with water.



Recommended for vertical and horizontal waterproofing on façades, terraces and roofing without cracks or with micro-cracks up to 1,5 mm, provided there is a run-off slope above 1%. Also particularly suitable for eliminating moisture problems in hard to reach places that are not exposed to continuous traffic.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Direct pull-off adhesion - Permeability to rain water and water vapour - Anti-carbonation - Transmission of liquid water and water vapour - Class A4 crack resistance - Fire retardant to B-s1,d0 standard.

ADHESION	PERMEABILITY	ANTI-CARBONATION
TRANSMISSION	RESISTANCE	SOLAR REFLECTIVE
		FIRE RETARDANT B-s1,d0

15 l

4 l

☐ White base/P (62.601)

☒ Red* (62.602)

☐ Deep base/TR (62.695)

JUNO Façades Colour CARD

Waterproofing Colour CARD

JUNOTERAS

Semi-matt finish



Elastomeric waterproofing paint.

Formulated with acrylic-styrene copolymers. Junoteras provides excellent surface adhesion and opacity. Improves surface energy efficiency.

For exterior use.

Cleaning and dilution with water.



Recommended for vertical and horizontal waterproofing on façades, terraces and roofing without cracks or with micro-cracks, provided there is a run-off slope of over 1%. Also particularly suitable for eliminating moisture problems in hard to reach places that are not exposed to continuous traffic, and for painting and renewing tired looking roof tiles.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Direct pull-off adhesion - Permeability to rain water and water vapour - Anti-carbonation - Transmission of liquid water and water vapour - Fire retardant to B-s1,d0 standard.

ADHESION	PERMEABILITY	ANTI-CARBONATION	TRANSMISSION	SOLAR REFLECTIVE	FIRE RETARDANT B-s1,d0
----------	--------------	------------------	--------------	------------------	------------------------

15 l

4 l

☐ White (62.641)

☒ Red* (62.642)

☐ Green* (62.643)

☐ Grey* (62.644)




☐ Tile* (62.645)

☐ Black* (62.645)


Waterproofing Colour CARD

Specialty Exterior Products




Silicate Paint System

<p>MINERAL PRIMER Matt finish</p>  <p>JUNO Façades Colour CARD</p>	<p>Water-based mineral primer based on potassium silicate with excellent penetration and adhesion properties. For interior and exterior use. Cleaning and dilution with water.</p>	<p>Recommended as a base coat in silicate paint systems that require binding, including protecting mineral surfaces such as lime and cement renders, gypsum plasters and stonework. Its also ideal for problematic areas such as damp basements and can also be used as a stabilising primer for powdery and friable surfaces. For a high quality breathable paint system Silicato-Silicate Paint (75.362) is recommended as a topcoat.</p> <p>15 l</p> <p><input type="checkbox"/> Translucent white (75.302)</p>
<p>SILICATO Matt finish</p>  <p>JUNO Façades Colour CARD</p>	<p>Highly breathable silicate paint. A matt, durable and highly breathable alternative to conventional masonry paints and limewash. Formulated with potassium silicate, fillers, additives and inorganic pigments stable to light and weather. Chemically bonds to create a water/weather-resistant barrier. For interior and exterior use. Cleaning and dilution with water.</p> <p>EPD[®] THE INTERNATIONAL EPD SYSTEM</p> <p><input type="checkbox"/> White base/P (75.362)</p>	<p>Suitable for use on stone, masonry, concrete, pebble dash, plaster and silicate paint surfaces. Perfect match for heritage projects and old buildings.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - A+ Certified for clean interior environment - Meets health related evaluation procedure for emissions of VOC's (German AgBB 2018) - Fire retardant to B-s1,d0 standard.</i></p> <p>15 l 4 l</p> <p></p>


Exterior Pliolite paint

<p>JUNOLITE FAÇADES Matt finish</p>  <p>JUNO Façades Colour CARD</p>	<p>Self-cleaning, breathable Pliolite® paint. Junolite is a premium quality, solvent-based masonry paint formulated for exterior use. Formulated with Pliolite® resins and organic solvents. Offers protection against alkalis and salt efflorescence. For exterior use. Cleaning and dilution with chlorinated rubber solvent D-40 (Code 50.000).</p> <p>EPD[®] THE INTERNATIONAL EPD SYSTEM</p> <p><input type="checkbox"/> White base/P (62.900)</p>	<p>Junolite provides a long lasting coating with good adhesion and resistance to moisture and alkali attack on exterior surfaces such as cement rendering, rough cast, brick and concrete.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration).</i></p> <p>15 l</p>
--	---	---

Exterior sealers & primers

<p>HIDROCRIL <i>Semi-matt finish</i></p> 	<p>Water-based acrylic sealer concentrate providing excellent penetration and adhesion. For interior and exterior use. Cleaning and dilution with water. Mixing ratio 4:1 (Water / Hidrocril).</p>	<p>Hidrocril evens out surface absorption. Recommended as a sealer for surfaces that have problems with adhesion (pearlite, concrete, plaster, cement, asbestos cement, brick), or require binding (tempera, lime, whitewash or unconsolidated paints).</p>
<p>AKRIL - 80 <i>Semi-matt finish</i></p> 	<p>Solvent-based acrylic sealer concentrate. For interior and exterior use. Cleaning and dilution with white spirit D-16 (Code 50.012). Mixing ratio 1:1 (D-16 / Akрил-80).</p>	<p>Akril-80 evens out surface absorption. Recommended for sealing surfaces and strengthening damaged or absorbent surfaces (plaster, stone, cement, concrete, old paint, etc.).</p>
<p>PRIMERLITE <i>Matt finish</i></p> 	<p>Solvent-based primer based on Pliolite resins. For interior and exterior use. Cleaning and dilution with chlorinated rubber solvent D-40 (Code 50.000).</p>	<p>Recommended as a primer for cement and concrete surfaces where a permeable system of the highest quality is required. Its resistance to alkalis and high penetration power stand out. Primerlite is the primer of choice for JUNO's Exterior paint systems, and is often prescribed for use with Novokril, Junokril, Bikril, etc.</p>

Water repellent masonry sealer




























<p>SILOXANE SEALER</p> 	<p>Solvent-based protection for porous mineral surfaces. Formulated with polysiloxane compounds as a hydrophobic impregnation to reduce the absorption of rainwater. Allows water to bead on top of the substrate. For exterior use. Product ready to use, do not dilute. Cleaning with white spirit D-16 (Code 50.012).</p>	<p>Recommended for improving protection against rain on vertical surfaces. Maintains breathability on non-vitrified brick, sandstone, natural stone, concrete and masonry, etc. Forms a long-lasting water-repellent barrier that protects the surface from the elements and won't crack or peel with time. Does not alter the appearance of the treated surface.</p>
---	---	---










INTERIOR PAINTS

- ▮ Interior emulsions
- ▮ Trade emulsions ideal for spraying
- ▮ Certified washable paints
- ▮ Hygienic / Anti-bacterial paint
- ▮ Decorative Tinting Bases
- ▮ Coloured emulsions
- ▮ Sealers
- ▮ Stain blocks

Interior emulsions

<p>B-12 Semi-matt finish</p>  	<p>Premium water-based lustre paint with excellent levelling, washability and a silky touch. With anti-mould protection.</p> <p>Premium vinyl copolymer-based paint with broad spectrum of anti-fungal and mould protection. Suitable for all interior walls and ceilings. Cleaning and dilution with water.</p>  <p>White / Semi-matt finish (72.010)</p>	<p>Recommended for decorating plaster, cement or masonry surfaces that require mould protection. Specified and used in high-end decoration jobs for maximum finish and protection. Also recommended for kitchens and bathrooms, or for high-traffic areas such as hallways. Highly wet-rub resistant.</p> <p>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.</p>  <p>15 l 4 l 750 ml</p>
<p>B-10 Semi-matt finish</p>  	<p>Durable water-based paint with a semi-matt lustre finish. With anti-mould protection and non-drip/splatter formulation.</p> <p>B-10 is a high quality vinyl copolymer paint offering excellent coverage, opacity and ease of application. Suitable for all interior walls and ceilings. Cleaning and dilution with water.</p>  <p>White / Semi-matt finish (72.000)</p>	<p>Ideal for high-quality interior decoration of walls and ceilings in any type of building. Washable and stain resistant, perfect for kitchens, children's rooms, hallways, etc.</p> <p>B-10 splashes to a minimum level when applied making it ideal for decorating lived-in spaces.</p> <p>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.</p>  <p>15 l 4 l 750 ml</p>
<p>B-7 ECOLOGICAL Matt finish</p>  	<p>Odourless eco-certified interior emulsion.</p> <p>High quality certified ecological emulsion paint. Formulated with vinyl copolymers, free from solvents, volatile organic compounds (VOCs) and alkyl phenol oxyethylene derivatives.</p> <p>B-7 is odourless and free from harmful substances. Suitable for all interior walls and ceilings. Cleaning and dilution with water.</p>  <p>Blanco / Mate (72.195)</p>	<p>Ideal for decorating walls and ceilings where a quality matt silky smooth finish is required. Recommended for decorating hospitals, nurseries, baby rooms or spaces for hypersensitive people, thanks to its zero emissions of volatile organic components. Permits immediate use of spaces after application. B-7 is highly wet-rub resistant.</p> <p>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - TÜV mark pollutant tested - Eco-label (European Eco-label) - Fire retardant to B-s1,d0 standard - Certified Class 2 for Washability and Opacity as per standard UNE-EN 13300-2002.</p>      <p>15 l 4 l</p>
<p>B-5 Matt finish</p>  	<p>Versatile quality interior matt emulsion. Water-based paint with great hiding power and coverage. With anti-mould protection and non-drip/splatter formulation.</p> <p>Formulated with acrylic copolymers with anti-fungicidal and anti-mould agents. Suitable for all interior walls and ceilings. Cleaning and dilution with water.</p>  <p>White / Matt finish (73.001)</p>	<p>B-5 dries to a beautiful, smooth matt finish that is fully wipeable and formulated to help conceal surface imperfections. Also ideal for protection against the formation of fungi and mould in kitchens and bathrooms. B-5 is also fire retardant. Wet-rub resistant.</p> <p>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard - Certified Class 2 for Washability and Class 1 for Opacity as per standard UNE-EN 13300-2002.</p>    <p>New</p> <p>15 l 10 l 4 l 2,5 l 750 ml</p>
<p>B-4 NATURE Matt finish</p>  	<p>Odourless water-based eco-paint with A⁺ certification for maximum indoor air quality.</p> <p>Formulated with vinyl copolymers. Catalogued with A⁺ certification, the maximum classification for indoor air quality, guaranteeing the lowest possible emission levels.</p> <p>B-4 is an ecological, solvent-free, odourless white emulsion offering a smooth matt finish that is fully wipeable and formulated to help conceal surface imperfections. Suitable for all interior walls and ceilings. Cleaning and dilution with water.</p>  <p>White / Matt finish (73.271)</p>	<p>Recommended for decorating hospitals, nurseries, baby rooms or indoor spaces for hypersensitive people. Allows immediate use of painted spaces.</p> <p>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - A⁺ Certification for low emissions and maximum indoor quality - Fire retardant to B-s1,d0 standard.</p>   <p>15 l 4 l</p>




Trade emulsions ideal for spraying

<p>J-33 Extra-matt finish</p>  	<p>High opacity and coverage extra-matt emulsion paint. With anti-mould protection and non-splatter technology.</p> <p>Formulated with acrylic copolymers. For interior and exterior use. Cleaning and dilution with water.</p>	<p>Recommended for general use in construction and decoration, especially for walls and ceilings where an extra- matt finish is required.</p> <p><i>APPROVAL CERTIFICATES: Fire retardant to B-s1,d0 standard (white only) - Certified Class 1 for Washability and Opacity as per standard UNE-EN 13300-2002.</i></p> <div> <div>FIRE RETARDANT B-s1,d0</div> <div>WASHABILITY CLASS 1</div> <div>OPACITY CLASS 1</div> </div> <p>15 l 4 l</p> <p><input type="checkbox"/> White / Matt finish (73.424)</p>
<p>J-28 Extra-matt finish</p> 	<p>Water-based emulsion paint with an extra-matt finish, special for coating projected plaster and plasterboards. With anti-mould protection.</p> <p>Formulated with acrylic copolymers in aqueous dispersion, titanium dioxide and extenders. Suitable for all interior walls and ceilings. Cleaning and dilution with water.</p> 	<p>Recommended for general use in construction and decoration, especially to hide fillers and joints on applied plaster, plasterboard or gypsum. J-28 is excellent for spraying large surface areas and touches up very well. Resistant to wet rubbing and scuffing.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard - Certified Class 2 for Washability and Opacity as per standard UNE-EN 13300-2002.</i></p> <div> <div>FIRE RETARDANT B-s1,d0</div> <div>WASHABILITY CLASS 2</div> <div>OPACITY CLASS 2</div> </div> <p>15 l 4 l</p> <p><input type="checkbox"/> White / Matt finish (73.168)</p>
<p>J-25 Matt finish</p> 	<p>High opacity interior emulsion paint with superb coverage and anti-mould protection.</p> <p>Formulated with acrylic copolymers in aqueous dispersion, titanium dioxide and extenders. Excellent bright opaque white finish at excellent value for money. Suitable for all interior walls and ceilings. Cleaning and dilution with water.</p>  <p>i</p>	<p>Recommended for general use in construction and decoration, especially for walls and ceilings where a matt finish is required. Resistant to wet rubbing and scuffing. J-25 is excellent for spraying and touches up very well.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard (white only) - Certified Class 2 for Washability and Class 1 for Opacity as per standard UNE-EN 13300-2002.</i></p> <div> <div>FIRE RETARDANT B-s1,d0</div> <div>WASHABILITY CLASS 2</div> <div>OPACITY CLASS 1</div> </div> <p>15 l 4 l</p> <p><input type="checkbox"/> White / Matt finish (73.150)</p> <p><input checked="" type="checkbox"/> Black / Matt finish* (73.173)</p>
<p>FULLCOVER Matt</p> 	<p>Contract matt emulsion.</p> <p>Breathable acrylic contract matt emulsion paint with excellent opacity and whiteness. For interior ceilings and walls. Cleaning and dilution with water.</p>	<p>Provides excellent coverage and dries to an outstanding opacity on interior walls and ceilings leaving a permeable breathable finish. Ideal for use as a base coat on new plaster or plasterboard where a flat matt opaque finish is required. Also suitable for use on aged plaster, wall boards, concrete, cement rendering, brickwork and internal blockwork.</p> <p><i>APPROVAL CERTIFICATES: Fire retardant to B-s1,d0.</i></p> <div> <div>FIRE RETARDANT B-s1,d0</div> </div> <p>15 l</p> <p><input type="checkbox"/> White / Matt (00.800)</p>

Certified washable paints

<p>N-5 Matt finish</p> 	<p>Matt water-based emulsion paint with AENOR certification for washability. With anti-mould protection.</p> <p>Based on acrylic copolymers in aqueous dispersion. Resistant to wet rubbing, breathable, with excellent hiding power and maximum performance.</p> <p>For interior use.</p> <p>Cleaning and dilution with water.</p> <p> EPD[®] THE INTERNATIONAL EPD SYSTEM</p> <p><input type="checkbox"/> White / Matt finish (73.040)</p>	<p>Recommended for general use in construction and decoration on typical surfaces such as plaster, plasterboard, gypsum, concrete, cement, etc. Ideal for spraying. Recommended for public and private projects where finishes with guaranteed washability and anti-mould protection is required. Ideal for high traffic and frequently used public areas, such as schools, hospitals, kindergardens, prisons, etc.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - AENOR Certified for washability - Fire retardant to B-s1,d0 standard.</i></p> <p> </p> <p>15 l 4 l 750 ml</p>
<p>CASTOR-N Matt finish</p> 	<p>Matt water-based emulsion paint with AENOR certification for washability. With anti-mould protection.</p> <p>Based on acrylic copolymers in aqueous dispersion.</p> <p>For interior use.</p> <p>Cleaning and dilution with water.</p> <p> EPD[®] THE INTERNATIONAL EPD SYSTEM</p> <p><input type="checkbox"/> White / Matt finish (73.113)</p>	<p>Recommended for general use in construction and decorating on plaster, plasterboard, concrete, cement surfaces, etc. Ideal for spraying.</p> <p>Great washability, with high hiding power and great performance. Required in public and private projects with a comprehensive system of certified building specifications.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - AENOR - Fire retardant to B-s1,d0 standard.</i></p> <p> </p> <p>15 l 4 l</p>

Hygienic / Anti-bacterial paint

<p>N-5 HYGIENIC Matt finish</p> 	<p>Hygienic water-based and washable emulsion paint with anti-bacterial and anti-microbial properties. With anti-mould protection.</p> <p>Based on acrylic copolymers in aqueous dispersion. Prevents bacterial formation and proliferation thanks to its silver-ion formulation.</p> <p>For interior use.</p> <p>Cleaning and dilution with water.</p> <p><input type="checkbox"/> White / Matt finish (73.289)</p>	<p>Recommended for schools, nurseries, hospitals, laboratories, health centers, public institutions and home decoration. Maximum performance, excellent hiding power and matt white finish. Specified and used in public and private projects where certified specifications and qualities are required.</p> <p><i>APPROVAL CERTIFICATES: Fire retardant to B-s1,d0 standard - Anti-bacterial certified.</i></p> <p> </p> <p>15 l 4 l</p>
--	---	--

CERTIFIED WASHABLE paints

Paint specified for public works, public and private institutions, schools, hospitals, universities, prisons, etc.

- ✓ Certified washability
- ✓ Great performance
- ✓ Excellent hiding power



Decorative Tinting Bases

JUNOPROF

Matt finish



High performance interior emulsion for tinting system with excellent washability and class leading coverage and opacity. With anti-mould protection and non-drip/splatter formulation.

Formulated with acrylic copolymers in aqueous dispersion.

For interior use.

Cleaning and dilution with water.



Acabado mate

12 l

4 l

2 l

750 ml

White base/P (88.750)

Medium base/D (88.751)

Deep base/TR (88.752)

Yellow base/GL* (88.753)

Red base/RD* (88.754)

Low odour emulsion giving a tough finish on surfaces of blockwork/brickwork, cement render, concrete, plaster, plasterboards, gypsum, wallboards, etc. Ideal for designer home decoration, hotels, hospitals, public buildings, etc.

Available in a market leading number of colours incl. 300 exclusive new JUNO Designer Palette colours.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - A+ Certified - Fire retardant to B-s1,d0 standard - Meets health related evaluation procedure for emissions of volatile organic compounds AgBB as per German evaluation standards - Certified Class 1 for Washability and Class 2 for Opacity as per UNE-EN 13300:2002.



JUNO prof

Water-based matt emulsion paint for JUNOMATIC tinting system



Certifications:



Coloured emulsions



Quality coloured emulsions for walls and ceilings. With anti-mould protection.

JUNODECO packaging comes in a rectangular shape and has a built-in grid tray for paint rollers allowing for an easy dip-and-go application.

For interior use.

Cleaning and dilution with water.

Thanks to its quick drying application and great opacity, JUNODECO is recommended for decorating any wall or ceiling space where a quality matt finish is required. Especially recommended for quick turnaround of lived-in spaces.



4 l

2,5 l

White (72.330)
Corn* (72.331)
Mustard* (72.332)
Sand* (72.333)
Peach* (72.334)
Linen* (72.336)
Beige* (72.337)

Lilac* (72.338)
Lavender* (72.339)
Moon* (72.341)
Stone* (72.342)
Anthracite* (72.343)
Pumpkin* (72.344)
Pear* (72.346)





Apple* (72.347)
Fern* (72.348)
Magenta* (72.349)
Sky blue* (72.351)
Blue* (72.352)

Sapphire* (72.353)
Strawberry* (72.354)
Cinnamon* (72.335)






Blackberry* (72.340)
Vermillion* (72.345)
Aubergine* (72.350)

Cherry* (72.355)

Sealers

HIDROCRIL Semi-matt finish 	Concentrate water-based acrylic sealer with excellent penetration and adhesion. For interior and exterior use. Cleaning and dilution with water. Mixing ratio 4:1 (Water / Hidrocril). <input type="checkbox"/> Clear (81.006)	Hidrocril evens out surface absorption. Recommended as a sealer for surfaces that have problems with adhesion (pearlite, concrete, plaster, cement, asbestos cement, brick), or require binding (tempera, lime, whitewash or unconsolidated paints). 20 l 4 l 750 ml
AQUASELL Matt finish 	Special water-based sealer for projected plasters. Formulated with acrylic resins in aqueous dispersion with great filling and sealing capacity. For interior and exterior use. Cleaning and dilution with water. <input type="checkbox"/> White / Matt finish (21.203)	Recommended as a base coat on surfaces on which there are significant differences in absorption levels (mineral substrates, drywalls or applied/projected plasters). <i>APPROVAL CERTIFICATES: Fire retardant to B-s1,d0 standard.</i>  15 l 4 l
ANTI-HUMIDITY SEALER Matt finish 	Quick-drying anti-humidity sealer. Formula based on pliolite resins with portland cement and additives with insulating properties. Ideal for both interior and exterior walls subjected to occasional humidity, grease or oily conditions, preventing their appearance. Cleaning and dilution with white spirit D-16 (Code 50.012). <input type="checkbox"/> White / Matt finish (88.000)	Recommended to eliminate problems of occasional humidity in ceilings, walls, basements, garages, etc. Its quick drying allows repainting with all types of paints, wallpapering or applying any other suitable surface treatment. 4 l 750 ml

Stain blocks

STAIN BLOCK Matt finish 	Synthetic stain block with Plioway. Odourless. Formulated with high quality Plioway resins with stain-resistant and mould prevention properties. Suitable for use on interior walls and ceilings. Cleaning and dilution with odourless solvent D-69 (Code 50.073). <input type="checkbox"/> White / Matt finish (21.350)	Recommended for all types of surfaces that have damp, grease, nicotine or other stains, or surfaces that have lost their hue. Also recommended as a finishing coat. When re-coating with water-based emulsions ensure the stain block has fully cured to avoid stains resurfacing. 15 l 4 l 750 ml
JUNOSTOP Matt finish 	Synthetic stain block with Plioway. Formulated with special resins with stain resistant and mould prevention properties. Suitable for use on interior walls and ceilings. Cleaning and dilution with odourless solvent D-69 (Code 50.073). <input type="checkbox"/> White / Matt finish (21.300)	Recommended for all types of surfaces that have damp, grease, nicotine or other stains, or surfaces that have lost their hue. Also recommended as a finishing coat. When re-coating with water-based emulsions ensure the stain block has fully cured to avoid stains resurfacing. 15 l 4 l 750 ml
STAIN BLOCK SPRAY Matt finish 	White synthetic stain blocking spray. Quick drying and easy application stain blocker. For interior and exterior use. 500 ml aerosol. <input type="checkbox"/> White / Matt finish (760.135)	Recommended for covering and preventing the reappearance of all types of stubborn stains (grease, damp, nicotine, felt tip pens, etc.). Thanks to its easy application, repainting, quick-drying properties and great durability, it can be used as a base for other topcoats. 500 ml
AQUATAPA Matt finish 	Odourless water-based stain block primer. Formulated with acrylic resins with stain resistant properties to seal, bind and prevent the migration of stains through the paint film. For interior walls and ceilings. Cleaning with water. Do not dilute. <input type="checkbox"/> White / Matt finish (21.205)	Recommended for stains including smoke damage, nicotine/inks and ideal for areas exposed to smoke, steam or condensation (boilers outlets, tanks, fireplaces). Seals mineral substrates such as powdery surfaces, limewash and distemper. Also recommended as a finishing coat. <i>APPROVAL CERTIFICATES: Fire retardant to B-s1,d0 standard.</i>  15 l 4 l 750 ml



FLOOR COATINGS

- ▮ Single-pack floor paint
- ▮ Two-pack floor paints
- ▮ High-build (100% solids) epoxy systems
- ▮ Pool/Milking Parlours/Traffic marking
- ▮ Line marking for grass and turf

Single-pack floor paints

JUNOSOL

Semi-matt finish



Easy to apply and quick-dry water-based one component floor paint.

Formulated with styrene-acrylic resins that provide great strength.

For interior and exterior use.

Cleaning and dilution with water.

Suitable for internal and external applications such as on tarmac, concrete, asphalt, walls and bricks. Ideal for painting sports facilities, line marking and car parks with light traffic.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Class 3 anti-slip resistance with special micro-beads (see page 36) - Fire retardant to B-s1,d0 standard.



SLIP RESISTANT

FIRE RETARDANT
B-s1,d0



15 l

4 l

White (06.162)

Tennis green* (06.150)

Cement grey* (06.163)

Tennis red* (06.160)

Light grey* (06.164)

Yellow* (06.166)

FLOOR COATINGS
Colour CARD

DYNAMOL

Satin finish



Quick-drying chlorinated rubber paint with high resistance to acids.

Formulated with chlorinated rubber resins with high resistance to acids and alkalis.

For interior and exterior use.

Cleaning and dilution with chlorinated rubber solvent D-40 (Code 50.000).

Ideally suited for application to brickwork, swimming pool enclosures, pool structures, walls, floors, parkings, sewage tanks, etc. Also suitable for milking parlours, stables, kennels and catteries. Not suitable for painting tar and/or bituminous asphalt surfaces due to bleeding.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Class 3 anti-slip resistance with special micro-beads (see page 36).



SLIP RESISTANT



15 l

4 l

750 ml

White (RAL 9010) (09.500)

Tennis red* (09.568)

Pearl grey* (09.533)

Black* (09.501)

Yellow* (09.525)

Tennis green* (09.552)

Bright red* (09.553)

(Available in 4L and 750ml)

FLOOR COATINGS
Colour CARD

Two-pack floor paints - Water-based

DYNAPOK AGUA FLOOR PRIMER / CLEAR TOPCOAT 2/C

Satin finish



Two-pack water-based floor epoxy primer.

Formulated with epoxy resin in aqueous solution. Excellent substrate penetration and filling capacity.

Also formulated to be used as a clear topcoat.

For interior use.

Cleaning and dilution with water.

As primer (dilute 30%) for sealing new or consolidated concrete or cement surfaces. As finishing coat (dilute 10%) for the protection of concrete surfaces exposed to contact with water, grease, acids or diluted alkalis.

Ideal for use in industrial applications in general, and especially in the food and health sector industries as it is water based and no solvent is required.

15 l

4 l

1 l

Clear (07.160)

DYNAPOK AGUA EPOXY 2/C

Satin finish



Certified hygiene epoxy coating. Ideal for spaces with reduced access to ventilation.

A two-pack epoxy coating formulated with non-toxic epoxy resin in a water-based solution. High chemical resistance and great strength.

Interior use.

Cleaning and dilution with water.

Ideal where hygiene coating is specified, and essential for interior spaces with reduced access to ventilation, where conventional paints with organic solvents would be toxic.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Meets health related evaluation procedure for emissions of VOC's (German AgBB 2018) - A+ Certified for clean interior environment - Non-toxicity cert.: Non migration of certain elements EN 71-3:2013+A2:2017 - Class 3 anti-slip resistant with special micro-beads (see page 36) - Fire retardant rating for floors to Bfl-s1 standard.



AgBB

A+

CERTIFICATE
HEALTH

SLIP RESISTANT

FIRE RETARDANT
Bfl-s1



15 l

4 l

White base/P (07.132)

English red* (07.143)

Green* (07.144)



Grey* (07.145)

Deep base/TR (07.133)



FLOOR COATINGS
Colour CARD

JUNOMATIC Tinting System

Two-pack floor paints - Solvent-based

<p>IMPRIMAX 2/C PRIMER Semi-gloss</p> 	<p>Two-pack synthetic floor epoxy primer. Silane-modified epoxy-polyamide reinforcing primer providing class-leading adhesion on smooth non-porous surfaces, like power-floated concrete and tiles. For interior use. Cleaning and dilution with epoxy solvent D-90 (Code 50.010).</p>	<p>Recommended as an epoxy adhesion primer coating on non-porous surfaces for interior epoxy systems.</p>
	<p><input type="checkbox"/> Clear (48.725)</p>	<p>15 l 4 l 1 l</p>
<p>PAVIMYC 2/C Gloss finish</p>  <p>ANTI-SLIP OPTION</p> <p>FLOOR COATINGS Colour CARD</p>	<p>Two-pack epoxy floor paint with excellent hardness and adhesion properties. Ensures effective protection against carbonation of concrete. Resistance to acids, alkalis and solvents, and provides erosion protection to concrete pavements exposed to traffic, chemicals, cleaning systems, etc. For interior use only. Cleaning and dilution with epoxy solvent D-90 (Code 50.010).</p> <p>EPD THE INTERNATIONAL EPD SYSTEM</p> <p><input type="checkbox"/> Clear (07.815)</p> <p>English red* (07.812) Green* (07.814) Grey* (07.807)</p>	<p>Product widely used on concrete floors in industrial and non-industrial settings. Ideal for indoor car parks, laboratories, chemical and pharmaceutical facilities, mechanical workshops, etc. Not recommended for use on asphalt, tar or bitumen treated surfaces.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Class 3 anti-slip resistant with added special micro-beads (see page 36).</i></p> <p>SLIP RESISTANT</p> <p>15 l 4 l</p>

High-build (100% solids) epoxy systems

<p>New</p> <p>PAVIMYC HB 2/C EPOXY PRIMER High Satin finish</p> 	<p>2K Epoxy Primer 100% solids. Formulated based on modified epoxy resins. Easy application. Impermeable to water and water vapour. Very good adhesion and penetration. Interior use and application. Use D-90 thinner for cleaning. (Code 50.010).</p>	<p>Recommended for cement and concrete substrates. Creates solid floor paint system in combination with Pavimyc HB 2/C (07.931) Primer coat for JUNO's PAVIMYC HB Floor systems (smooth, non -slip, multi-layer or self -leveling floor systems).</p>
	<p><input type="checkbox"/> Clear (07.915)</p>	<p>20 kg</p>
<p>New</p> <p>PAVIMYC HB 2/C EPOXY FLOOR COATING Gloss</p>  <p>ANTI-SLIP OPTION</p> <p>JUNOMATIC Tinting System</p>	<p>High-build (100% Solids) pigmented 2K epoxy coating to seal and protect floors. Formulated with 100% solids epoxy resins and pigments achieving high chemical resistance and hardness. Great opacity and coverage level. Allows for an even floor surface with low paint consumption. Facilitates cleaning of any type of surface stains/dirt. For interior use. Use D-90 thinner for cleaning. (Code 50.010).</p>	<p>Recommended to protect concrete floors from wear and tear, chemical agents thus expanding their life cycle. Pavimyc HB offers different systems for continuous coatings. (smooth, non-slip, self-levelling, multi-layer) with one and same product. Indicated for garages, workshops, parkings, wineries, warehouses, industrial factories, data centres, etc. Not recommended for use on asphalt, tar or bitumen treated surfaces.</p> <p><i>APPROVAL CERTIFICATES: CE Certified (see below) - Bfl-s1 Euroclass Fire retardant certified - Class 3 Anti-slip rating when used with Pavimyc HB Microbeads (see page 36).</i></p> <p>UNE-EN 1062-6:2003 UNE-EN 1062-3:2008 UNE-EN 13529:2005 UNE-EN ISO 6272-1:2012 UNE-EN ISO 7783:2019 UNE-EN 1542:2000 UNE-EN ISO 5470-1:2017 UNE-EN 13892-2:2003</p> <p>CE IGNIFUGO Bfl-s1</p> <p>20 kg</p> <p>Deep base/ TR (07.931) for tinting into on demand colours</p>

Swimming pool paint / Milking parlours / Traffic marking

JUNOSPORT

Satin finish



Water-based durable, strong and highly flexible paint for swimming pools.

Formulated with pure acrylic resins to resist the destructive effects of swimming pool chemicals. Exclusive use for concrete type swimming pools. For interior and exterior use. Cleaning and dilution with water.

Formulated for use over old or new concrete based swimming pools. Applied by brush, roller or spray, displaying excellent adhesion over sound previously painted surfaces. Also recommended as floor coating for other types of sports facilities and car parks with light traffic.

Blue colour is correct for marking disability car parking spaces.



4 l

Blue* (06.105)

PISCICLOR

Satin finish



Solvent-based durable, strong and highly flexible paint for swimming pools/milking parlours.

Formulated with chlorinated rubber resins with extraordinary resistance to weathering, chemical damage and discolouration. Exclusive use for concrete type swimming pools. For interior and exterior use. Cleaning and dilution with chlorinated rubber solvent D-40 (Code 50.000).

Recommended for painting swimming pools and milking parlours, sports facilities and car parks with light traffic. Also recommended as floor coating for other types of sports facilities and car parks with light traffic.

Blue colour is correct for marking disability car parking spaces.



4 l

Blue* (09.180)

Line marking for grass and turf

JUNOLINEA

Matt finish



Water-based line marking paint with high hiding power. Not harmful to natural grass.

Formulation based on high quality acrylic copolymers, giving bright white lines. For interior and exterior use.

Junolinea is the ultimate white line marking paint for use on football, rugby, hockey pitches and tennis courts and cricket squares. It is used by top professional clubs and give long lasting brilliant white lines (also used on farms, construction sites, hills/woodland, paths for occasional marking/signposting).

10 l


White / Matt finish (62.550)



— **NEW** —

100% SOLIDS EPOXY SYSTEM

FOR SEALING AND PROTECTING FLOORS

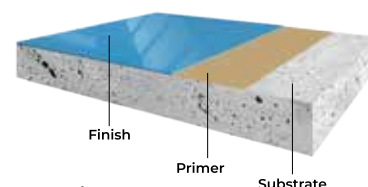

PAVIMYC HB 2/C

- The all-in-one floor paint: standard floorpaint, self-levelling and multi-layer systems
- Seals and protects concrete floors against any type of spillage
- Recommended for industrial sites, factories, warehouses, decoration, etc.





TRIM PAINTS

- ▮ Solvent-based enamels
- ▮ Water-based enamels
- ▮ Decorative & Industrial Enamels - Tinting bases
- ▮ Adhesion and anti-corrosive primers
- ▮ Wood primers / undercoats

Solvent-based enamels

JUNOLAC ANTIOXIDANT

Gloss finish



Satin finish



Quick-drying-antioxidant synthetic self-priming enamel.

Ready to apply directly on new or old steel or iron, whether bare or pre-painted. High gloss enamel, with excellent resistance to weathering and corrosive environments. For large surface areas the use of retarding thinner D-75 (Code 50.107) is recommended.

For interior and exterior use.

Cleaning and dilution with D-16 thinner (Code 50.012).



Recommended for iron or steel surfaces where exhaustive preparation of the substrate is not possible (large structures, gates, railings, bridges, etc.). Touch dry and repaintable in 1 hour.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard - Anti-corrosive properties certified according to UNE 48316: 2014.



In white and black

① Gloss finish

4 l 750 ml 375 ml

<input type="checkbox"/> White (04.860)	<input type="checkbox"/> Red* (04.866)
<input type="checkbox"/> Black* (04.861)	<input type="checkbox"/> Golden yellow* (04.867)
<input type="checkbox"/> Ochre* (04.862)	<input type="checkbox"/> Medium grey* (04.868)
<input type="checkbox"/> Arabia Brown* (04.863)	<input type="checkbox"/> Marine blue* (04.869)
<input type="checkbox"/> Txoko brown* (04.864)	<input type="checkbox"/> Spring green* (04.870)
<input type="checkbox"/> Bordeaux red* (04.865)	<input type="checkbox"/> Pine green* (04.871)

Deep base/TR (04.895)

New

122,60 € 25,50 € -

① Satin finish

4 l 750 ml 375 ml

<input type="checkbox"/> White (04.880)	<input type="checkbox"/> Red* (04.886)
<input type="checkbox"/> Black* (04.881)	<input type="checkbox"/> Golden yellow* (04.887)
<input type="checkbox"/> Ochre* (04.882)	<input type="checkbox"/> Medium grey* (04.888)
<input type="checkbox"/> Arabia brown* (04.883)	<input type="checkbox"/> Marine blue* (04.889)
<input type="checkbox"/> Txoko brown* (04.884)	<input type="checkbox"/> Spring green* (04.890)
<input type="checkbox"/> Bordeaux red* (04.885)	<input type="checkbox"/> Pine green* (04.891)

Deep base/TR (04.893)

New

In white and black

JUNOLAC ANTI-OX
Colour CARD

JUNOLAC

Gloss finish



Satin finish / Matt finish



High-solid synthetic enamel paint with great durability.

Premium quality high-solid solvent-based alkyd formulation which offers excellent flow, giving surfaces a tough, durable high-gloss finish.

For use on interior and exterior surfaces (gloss and satin finishes).

Cleaning and dilution with D-16 thinner (Code 50.012).



Recommended for interior and exterior use on wood and metal surfaces such as doors, window trims, furniture, etc.

Applied in thin layers to promote proper drying conditions and curing.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Meets health related evaluation procedure for emissions of VOCs AgBB 2018 - A+ certificate - Fire retardant to B-s1,d0 standard.



Gloss finish

4 l 750 ml 375 ml

<input type="checkbox"/> White (15.000)	<input type="checkbox"/> Black* (15.001)
---	--

Satin finish

4 l 750 ml 375 ml

<input type="checkbox"/> White (15.100)	<input type="checkbox"/> Black* (15.101)
---	--

Matt finish

4 l 750 ml 375 ml

<input type="checkbox"/> White (15.200)	<input type="checkbox"/> Black* (15.201)
---	--

JUNOPLUS

Gloss finish



Satin finish



Matt finish



JUNOPLUS Colour CARD
JUNOMATIC Tinting System

Synthetic alkyd-based enamel with wide range of colours.

Formulated with alkyd resins.

For use on interior and exterior surfaces (matt finish for interior use only).

Cleaning and dilution with D-16 thinner (Code 50.012).



Recommended for primed wood and metal surfaces. Can also be used on furniture.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.



! Gloss finish

4 l 750 ml 375 ml

<input type="checkbox"/> White (16.000)	<input type="checkbox"/> Carriage green* (16.011)
<input type="checkbox"/> Black* (16.001)	<input type="checkbox"/> Fire red* / RAL 2002 (16.012)
<input type="checkbox"/> Chamois* (16.002)	<input type="checkbox"/> Wagon red* / RAL 3005 (16.021)
<input type="checkbox"/> Meadow* (16.003)	<input type="checkbox"/> Blood red* / RAL 3000 (16.022)
<input type="checkbox"/> Grass green* (16.004)	<input type="checkbox"/> Medium yellow* / RAL 1028 (16.029)
<input type="checkbox"/> Ivory* (16.005)	<input type="checkbox"/> Light grey* / RAL 7035 (16.031)
<input type="checkbox"/> Traffic grey* (16.006)	<input type="checkbox"/> Cloud grey* / RAL 7001 (16.038)
<input type="checkbox"/> Ochre* (16.007)	<input type="checkbox"/> Dark grey* / RAL 7031 (16.039)
<input type="checkbox"/> Blue* / RAL 5012 (16.008)	<input type="checkbox"/> Meadow green* / RAL 6001 (16.054)
<input type="checkbox"/> Ultramarine* / RAL 5002 (16.009)	<input type="checkbox"/> Moss green* / RAL 6005 (16.058)
<input type="checkbox"/> Bright blue* / RAL 5017 (16.010)	<input type="checkbox"/> Arabia brown* (16.069)

Colours on demand (RAL colour chart, available from the Junomatic system, parting from colours in the Junoplus chart as bases)

! Satin finish

4 l 750 ml 375 ml

<input type="checkbox"/> White (16.100)	<input type="checkbox"/> Black* (16.101)
<input type="checkbox"/> Ultramarine* / RAL 5002 (16.109)	<input type="checkbox"/> Light grey* / RAL 7035 (16.131)
<input type="checkbox"/> Wagon red* / RAL 3005 (16.121)	<input type="checkbox"/> Meadow green* / RAL 6001 (16.154)
<input type="checkbox"/> Blood red* / RAL 3000 (16.122)	<input type="checkbox"/> Moss green* / RAL 6005 (16.158)
<input type="checkbox"/> Medium yellow* / RAL 1028 (16.129)	<input type="checkbox"/> Arabia brown* (16.169)

Colours on demand (RAL colour chart, available from the Junomatic system, parting from colours in the Junoplus chart as bases)

! Matt finish (for interior use only)

4 l 750 ml 375 ml

<input type="checkbox"/> White (16.200)	<input type="checkbox"/> Black* (16.201)
---	--

OXIFORJA

Forja



OXIFORJA Colour CARD

Synthetic enamel with a unique forged iron metallic finish effect and antioxidant properties.

Formulated with alkyd resins and additives with a high resistance to weathering.

For interior and exterior use.

Cleaning and dilution with white spirit D-16 (Code 50.012).



Recommended for the protection and decoration of lamp posts, mail boxes, manhole covers, iron gates, metal structures, fences, urban furniture, etc.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration).



4 l 750 ml

<input type="checkbox"/> Black* (05.700)	<input type="checkbox"/> Base / Steel grey* (05.701)	
<input type="checkbox"/> Azure (05.720)	<input type="checkbox"/> Gold (05.722)	<input type="checkbox"/> Intense black (05.725)
<input type="checkbox"/> Bronze green (05.721)	<input type="checkbox"/> Oxide red (05.723)	

Esmaltes al agua

WATERPLUS

Satin finish / Matt finish



Single-pack water-based Polyurethane enamel paint. Impeccable lacquered finish for walls, furniture and trims.

Water-based multi-surface polyurethane enamel with excellent hardness washability and chemical resistance. Offers excellent application/levelling properties and opacity for an impeccable finish. Resists rubbing, scratches, impacts and most cleaning products.

For interior use.

Cleaning and thinning with water.



Recommended for all types of surfaces, especially wood and metal carpentry. Ideal for painting furniture, kitchens, doors, window trims, skirting boards, etc. and for perfect smooth and resistant finishes on walls, sandwich panels etc.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration).

Satin finish 15 l 4 l 750 ml

☐ White base/P (10.635)

☒ Deep base/TR (10.637) (coming soon)

Matt finish 15 l 4 l 750 ml

☐ White base/P (10.640)

☒ Deep base/TR (10.642) (coming soon)

JUNOMATIC Tinting System

AQUALAC

Gloss finish / Satin finish / Matt finish



Water-based multi-surface enamel, with low odour and easy-application properties.

Formulated with quick drying pure acrylic weather resistant resins. Low-odour and extraordinary weather resistance.

For interior and exterior use (gloss and satin finishes). Cleaning and dilution with water.

Recommended for the protection and decoration of properly prepared and primed metal, wood, masonry, plaster/drywall, trims, etc.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Meets health related evaluation procedure for emissions of VOCs AgBB 2018 - A+ Certified - Fire retardant to B-s1,d0 standard.



Gloss finish 4 l 750 ml

☐ White base/P (10.300)

☒ Medium base/D (10.302)

☒ Deep base/TR (10.303)

☒ Yellow base/GL* (10.304)

☒ Red base/RD* (10.305)

Satin finish 4 l 750 ml

☐ White base/P (10.400)

☒ Medium base/D (10.402)

☒ Deep base/TR (10.403)

☒ Yellow base/GL* (10.404)

☒ Red base/RD* (10.405)

Matt finish (for interior use only) 4 l 750 ml

☐ White base/P (10.500)

☒ Medium base/D (10.502)

☒ Deep base/TR (10.503)

JUNOMATIC Tinting System

AQUALAC Colour CARD

Decorative Enamels - Tinting bases

JUNOMALTE

Gloss finish / Satin finish



Synthetic enamel for Junomatic tinting system. Wide range of colours.

For interior and exterior use (exterior: Gloss finish only). Cleaning and dilution with D-16 white spirit (Code 50.012).

Especially recommended for primed interior and exterior wood and metal surfaces.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration).



Gloss finish 4 l 750 ml

☐ White base/P (88.990)

☒ Medium base/D (88.991)

☒ Deep base/TR (88.992)

Satin finish 4 l 750 ml

☐ White base/P (88.993)




☒ Medium base/D (88.994)

☒ Deep base/TR (88.995)









JUNO Combina

JUNOMATIC Tinting System



Industrial Enamels - Tinting bases

<p>JUNORAPID S/R Gloss finish</p>  <p>JUNOMATIC Tinting System</p>	<p>Quick-drying synthetic enamel for Junomatic industrial tinting system. For interior and exterior use. Cleaning and dilution with quick-dry thinner D-17 (Code 50.004).</p> <p>EPD THE INTERNATIONAL EPD SYSTEM</p> <p>Gloss finish</p> <p><input type="checkbox"/> White base/P (88.884)</p> <p><input checked="" type="checkbox"/> Deep base/TR (88.885)</p>	<p>Ideal and recommended for refinishing or applying to metal surfaces such as automated installations, structures, OEM coatings to forklifts, trucks, tractors, trailers, etc. that require a quick drying enamel. Application recommended by spraying.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Certified for JUNO's protective anti-corrosive systems as per ISO 12944.</i></p> <p>C3</p> <p>15 l 4 l 750 ml</p>
<p>JUNOPOXI 2/C Gloss finish</p>  <p>JUNOMATIC Tinting System</p>	<p>2-component epoxy enamel for Junomatic industrial tinting system. High chemical resistance. A high quality tintable epoxy for interior and industrial use. This product provides great coverage and is easy to apply. Anti-dust function. Cleaning and dilution with epoxy solvent D-90 (Code 50.010).</p> <p>EPD THE INTERNATIONAL EPD SYSTEM</p> <p>Gloss finish</p> <p><input type="checkbox"/> White base/P (88.882)</p> <p><input checked="" type="checkbox"/> Deep base/TR (88.883)</p>	<p>Recommended for protecting metal, cement or concrete surfaces in industrial or marine environments.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Class 3 anti-slip resistance when adding microbeads (see page 34).</i></p> <p>SLIP RESISTANT</p> <p>15 l 4 l 1 l</p>
<p>JUNORETANO 2/C Gloss finish / Satin finish / Matt finish</p>  <p>JUNOMATIC Tinting System</p>	<p>2K multi-surface polyurethane coating for Junomatic industrial tinting system. Great weather resistance. Anti-corrosion certified system. Formulated with 2 component aliphatic polyurethane giving a maximum chemical resistance. Combines great elasticity, hardness and adhesion on a multitude of surface types for a perfect smooth and very bright finish. Excellent properties for exterior use with high resistance to UV rays. Suitable for interior and exterior use. Cleaning and dilution with Junoretano solvent D-70 (Code 50.007).</p> <p>EPD THE INTERNATIONAL EPD SYSTEM</p> <p>Gloss finish</p> <p><input type="checkbox"/> White base/P (88.880)</p> <p><input checked="" type="checkbox"/> Deep base/TR (88.881)</p> <p>Satin finish</p> <p><input type="checkbox"/> White base/P (88.872)</p> <p><input checked="" type="checkbox"/> Deep base/TR (88.873)</p> <p>Matt finish New</p> <p><input type="checkbox"/> White base/P (88.801)</p> <p><input checked="" type="checkbox"/> Deep base/TR (88.802)</p>	<p>Recommended for the effective protection of all kinds of surfaces exposed to aggressive atmospheres in industrial and marine environments (metal, concrete, wood, polyester, PVC, fibreglass, ABS, etc)</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Class 3 anti-slip resistance when adding microbeads (see page 34) - Fire retardant to B-s1,d0 standard - Certified for JUNO's protective anti-corrosive systems as per ISO 12944.</i></p> <p>SLIP RESISTANT FIRE RETARDANT B-s1,d0 C4 C5</p> <p>15 l 4 l 1 l</p> <p>15 l 4 l 1 l</p> <p>4 l 1 l</p>

Adhesion and anti-corrosive primers

<p>METALEX Matt finish</p> 	<p>Anti-corrosive zinc-phosphate primer. Formulated with zinc phosphate and alkyd resins with rust inhibiting properties. For interior and exterior use. Cleaning and dilution with white spirit D-16 (Code 50.012).</p> <p><input type="checkbox"/> White / Matt finish (27.000)</p>	<p>Recommended for protecting metal surfaces that require protection against corrosion (except galvanized and aluminium surfaces).</p> <p>4 l 750 ml</p>
<p>MULTI-SUPPORT PRIMER Matt finish</p> 	<p>All-purpose synthetic multi-surface adhesion primer. Premium quality quick drying multi-surface primer based on modified alkyd resins and zinc phosphate acting as anti-rust pigment for long term protection. For interior and exterior use. Cleaning and dilution with quick-drying solvent D-17 (Code 50.004).</p> <p><input type="checkbox"/> White / Matt finish (27.040) <input checked="" type="checkbox"/> Black* / Matt finish (27.045)</p>	<p>This multipurpose bonding primer can be used as an impregnating and adhesion promoting primer for ferrous and non-ferrous metals, such as steel, aluminium, galvanized surfaces, PVC, glass, tiles and different wood materials such as wood panelling and trim (on wood - interior use only).</p> <p>APPROVAL CERTIFICATES: Fire retardant to B-s1,d0 standard (white only) - Certified for JUNO's protective anti-corrosive systems as per ISO 12944.</p> <p>15 l 4 l 750 ml</p> <p> </p>
<p>WORKSHOP PRIMER Matt finish</p> 	<p>Quick-drying synthetic primer. A very quick drying synthetic primer formulated with iron oxides and alkyd resins. For interior and exterior use. Cleaning and dilution with white spirit D-16 (Code 50.012).</p> <p><input checked="" type="checkbox"/> Oxide red* (22.110) <input type="checkbox"/> Grey* (22.111)</p>	<p>Recommended for preparing iron surfaces both as a workshop primer for temporary protection and as a general purpose primer in fast drying alkyd-based systems for protection in mild to medium atmospheric corrosive environments.</p> <p>15 l 4 l 750 ml</p> <p>222,90 € 65,25 € 14,85 €</p>
<p>WATERPRIM Matt finish</p> 	<p>Multi-surface waterbased anti-oxidant adhesion primer. Formulated with acrylic copolymers and anti-corrosive pigments of great durability. Unique in offering anti-corrosive properties. Contains low VOC levels and offers quick drying time. For interior and exterior applications. Cleaning and dilution with water.</p> <p><input type="checkbox"/> White / Matt finish (30.006)</p>	<p>Waterprim offers excellent adhesion on hard to paint interior and exterior substrates such as glossy surfaces, ceramic tiles, non-ferrous metal (such as aluminium, stainless steel and galvanised metal), vinyl, hardboard, melamine, varnish, plastic, GRP, UPVC, wood (interior use only), masonry and more.</p> <p>APPROVAL CERTIFICATES: Meets health related evaluation procedure for emissions of AgBB 2018 - A+ Certified.</p> <p>4 l 750 ml</p> <p> </p>

Wood primers / undercoats












<p>HANGERS SEALER Matt finish</p> 	<p>High opacity synthetic wood primer/undercoat. A quick-dry primer and undercoat for most interior and exterior new or bare wood surfaces. Provides the best possible adhesion and evens up variable absorption, giving a uniform surface for the finishing system. For interior and exterior use.</p> <p><input type="checkbox"/> White / Matt finish (21.000)</p>	<p>Cleaning and dilution with white spirit D-16 (Code 50.012).</p> <p>Recommended for preparing wooden and masonry surfaces. Can also be used as finishing coats on interior surfaces. Ideal for softwood, plywood, chipboard flake board, MDF, etc.</p> <p>4 l 750 ml</p>
<p>NATURESELL Matt finish</p> 	<p>Quick dry water-based wood primer/undercoat. Naturesell is a water-based, high opacity, dual purpose primer undercoat for interior and exterior woodwork, Formulated with acrylic resins in aqueous dispersion with great resistance and high opacity. For interior and exterior use.</p> <p><input type="checkbox"/> White / Matt finish (21.100)</p>	<p>Cleaning and dilution with water.</p> <p>Ideal for use as a primer for softwoods, hardwoods, chipboard and fibre board.</p> <p>4 l 750 ml</p>



WOOD

- ▮ Water-based
- ▮ Synthetic

Water-based

<p>AQUA BASE Matt finish</p> 	<p>Clear water-based wood preservative/undercoat for interior wood. Formulated with acrylic resins. For interior use. Cleaning and dilution with water.</p>	<p>Recommended as a sandable undercoat for all kinds of joinery including doors, windows and frames, parquet and other wood surfaces. Good filling power, easy application, quick drying and odourless. Valid treatment for both water based and synthetic topcoats.</p>
<p>AQUA VARNISH Gloss finish</p> 	<p>Special odourless water-based polyurethane varnish for parquet. Formulated with single component aliphatic polyurethane resins, providing a non-yellowing film with a high chemical resistance to wear. For interior use. Cleaning with water.</p> <p> EPD THE INTERNATIONAL EPD SYSTEM</p>	<p>Recommended for all types of parquet and wood surfaces due to its ease of application. Quick drying, with high resistance to abrasion and easy cleaning. Preparation is recommended with Aqua Base undercoat (Code 82.414). Product not suitable for oak or chestnut wood due to darkening of the surface treated.</p> <p>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration).</p>
<p>AQUADUR VARNISH Gloss finish / Satin finish / Matt finish</p> 	<p>Special water-based acrylic varnish for carpentry. Great hardness and chemical resistance. Formulated with acrylic resins, which provide a pleasant non-yellowing film. For interior use. Cleaning with water.</p> <p> EPD THE INTERNATIONAL EPD SYSTEM</p>	<p>Recommended for any interior wood surfaces, especially furniture. Recommended primer: Aqua Base undercoat (Code 82.414). Product not suitable for oak or chestnut wood due to darkening of the surface treated.</p> <p>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Meets health related evaluation procedure for emissions of AgBB 2018 - A+ Certified - Fire retardant to C-s1,d0 standard.</p> <p>  </p>
<p>LASUR ACUOSO Satin finish</p>  <p></p>	<p>Water-based woodstain with water-repellent properties. OPEN PORE protector with UV filters and anti-fungicidal protection. Formulated with acrylic resins, transparent pigments and fungicidal preservatives, which form a breathable, microporous, elastic, UV resistant film allowing moisture and air to be released. For interior and exterior use (clear woodstain for interior use only). Cleaning and dilution with water.</p> <p> EPD THE INTERNATIONAL EPD SYSTEM</p>	<p>Recommended for wooden surfaces exposed to weathering (wooden trim, doors, window frames, gates, fences, etc.). Does not crack or chip. Allows maintenance coats to be applied directly on to previous coats without need for removal. For interior use. For undercoat it is recommended to use Aqua Base (Code 82.414).</p> <p>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration).</p>

Synthetic

JUNOLAC VARNISH

Gloss finish / Satin finish /
Matt finish



Synthetic clear varnish with UV filters. Highlights wood's natural tones.

Formulated with alkyd resins and ultraviolet filters for a protective and decorative finish.

For interior use. Gloss finish also for exterior use.

Cleaning and dilution with mineral white spirit D-16 (Code 50.012).



Recommended for decorating and protecting wood surfaces such as window frames, doors, trim, furniture, etc.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration).

4 l 750 ml 375 ml

☐ Clear / Gloss finish (42.037)

☐ Clear / Satin finish (42.038)

☐ Clear / Matt finish (42.039)

JUNOTINTE VARNISH

Gloss finish



Synthetic coloured varnish with UV filters. For colourful and decorative finish.

Formulated with alkyd resins and ultraviolet filters for a protective and decorative finish.

For interior and exterior use.

Cleaning and dilution with white spirit D-16 (Code 50.012).



Recommended for decorating and protecting wood surfaces such as window frames, doors, trim, furniture, etc.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration).

750 ml 375 ml



☐ Pine* (42.040)

☐ Walnut* (42.041)

☐ Mahogany* (42.042)

☐ Chestnut* (42.043)

☐ Teak* (42.044)

☐ Rosewood* (42.045)

☐ Oak* (42.046)



JUNODUR VARNISH

Gloss finish / Satin finish



Special synthetic polyurethane varnish for parquet. Hardness and resistance to domestic use.

Formulated with urethane resins to obtain a protective, decorative finish, which is pleasant to the touch.

For interior use.

Cleaning and dilution with white spirit D-16 (Code 50.012).



Recommended for restoring and varnishing parquet and wooden floors that require a hard surface which is resistant to domestic use and neutral cleaning products.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration).

4 l 750 ml

☐ Clear / Gloss finish (44.001)

☐ Clear / Satin finish (44.002)

YACHT VARNISH

Gloss finish



Synthetic high build full gloss varnish with UV filters. Special for harsh weather conditions.

Formulated with alkyd resins of great flexibility and ultraviolet filters for a protective, decorative and highly durable finish of the highest quality.

For interior and exterior use.

Cleaning and dilution with white spirit D-16 (Code 50.012).



Recommended and suitable for hard and softwood subjected to harsh weather conditions humidity, salinity and solar exposure.

Contains UV filters which protect against strong sunlight.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration).

4 l 750 ml








☐ Clear / Gloss finish (42.036)







SUNDRIES


- ▮ Fillers & Caulk
- ▮ Colourants, Paint Stripper, additives, etc.
- ▮ Thinners & Cleaners
- ▮ Colour charts & Fan Decks






Fillers & Caulk

<p>JUNO FILLER <i>For preparation work</i></p> 	<p>Shrink & crack resistant filler for interior repairs. Removes small imperfections, grooves, cracks, etc. Theoretical performance: 1 m²/kg/mm thickness. Max. thickness per layer: 5 mm.</p>	<p>White powder. For interior use. Smooth finish.</p> <p>15 kg 5 kg 1 kg</p> <p><input type="checkbox"/> White (77.000)</p>
<p>READY MIX FILLER <i>For repairs</i></p> 	<p>Tintable ready mix repair filler. Smooth ready to use finish filler with excellent adhesion. Theoretical performance: 1.75 kg/m²/mm thickness. Max. thickness per layer: 2 mm.</p>	<p>Ready mix filler that can be coloured using JUNO universal colourants (max. 3%). For interior use. Smooth, very fine finish.</p> <p>5 kg 1 kg 500 gr.</p> <p><input type="checkbox"/> White (77.200)</p>
<p>SMOOTH FINISH FILLER <i>For finishing</i></p> 	<p>High performance interior finishing filler. For smoothing and levelling walls before painting or wallpapering. Theoretical performance: 1 m²/kg/mm thickness. Max. thickness per layer: 2 mm.</p>	<p>White powder. For interior use. Smooth finish.</p> <p>15 kg</p> <p><input type="checkbox"/> White (77.030)</p>
<p>SANDABLE FILLER <i>For renovations</i></p> 	<p>Easy-to-sand interior renovation filler Formulated to mix into a smooth consistency for easy application. Theoretical performance: 0.950 kg/m²/mm thickness. Max. thickness per layer: 5 mm.</p>	<p>White, easy-to-sand powder filler. For interior use. Smooth finish.</p> <p>15 kg</p> <p><input type="checkbox"/> White (77.410)</p>
<p>COVER ALL FILLER <i>For renovations</i></p> 	<p>Skimcoat filler for renovations. Smooths and levels textured decorative surfaces. Theoretical performance: 1 m²/kg/mm thickness. Max. thickness per layer: 5 mm.</p>	<p>White powder with good adhesion. For interior use. Smooth finish.</p> <p>15 kg</p> <p><input type="checkbox"/> White (77.406)</p>
<p>RAPID FILLER <i>For repairs</i></p> 	<p>A quick-set cement filler for repairs. A high performance quick drying filler for repairs of any masonry surfaces. For skimming surfaces in fine layers, up to 6 mm. Theoretical performance: 1.5 kg/m²/mm thickness. Max. thickness per layer: 5 mm.</p>	<p>White powder. For interior/exterior use. Fine and very hard finish.</p> <p>15 kg 5 kg</p> <p><input type="checkbox"/> White (77.301)</p>
<p>QUICK DRYING REPAIR MORTAR <i>For repairs</i></p> 	<p>White powder cement mortar specially designed for repairing, filling and rendering exterior surfaces. Quick set, great filling capacity and excellent adhesion. Easy application. Max. thickness/coat: 5 mm for wall; For repairs no thickness limit.</p>	<p>Practical coverage: 1,23 Kg/m² White powder. Exterior use.</p> <p>15 kg</p> <p><input type="checkbox"/> White (77.305)</p>

<p>PLASTE MULTIUSO <i>Reparar</i></p> 	<p>Powdered mortar for repairing, rebuilding or joining any surface. Suitable for humid environments such as bathrooms, kitchens, etc. Joins materials of different nature and/or absorption level. Direct application on ceramics. Theoretical performance: 1 kg/m²/mm. Thickness per layer: any thickness.</p>	<p>White powder. For interior/exterior use. Quick-drying.</p> <p>5 kg 1 kg</p> <p><input type="checkbox"/> White (77.050)</p>
<p>FIBRE enriched FILLER <i>For reinforcement</i></p> 	<p>Ready to use, flexible, fibre reinforced exterior/interior filler. For sealing and reinforcing dynamic cracks and fissures on plaster, concrete, etc. Does not crack or split, has high adhesion and permanent elasticity. Can be painted on, except with solvent based 2-component products. Theoretical performance: 1,2 kg/m²/mm.</p>	<p>Recommended thickness per layer: 0.3 to 3 mm. Light grey paste. For interior/exterior use.</p> <p>4 l 750 ml</p> <p><input type="checkbox"/> Light grey (77.250)</p>
<p>ANTI-CONDENSACIÓN FILLER <i>Thermal insulation</i></p> 	<p>Light anti-condensation filler for interior use: For smoothening, renewing and filling interior surfaces. Avoids "cold wall effect" and offers thermal and acoustic insulation. Great performance and filling capacity. Excellent adhesion properties. Interior use.</p>	<p>Before application eliminate and clean mould from surfaces with Junoclean (Code 760.180). Layer thickness: any thickness. Working time: 2 hours. Theoretical performance: 0.6kg/m² Grey powder.</p> <p>10 kg</p> <p><input type="checkbox"/> Light grey (77.302)</p>
<p>New MRT-100 <i>Bonding & rendering</i></p> 	<p>Mortar for bonding and rendering thermal insulation boards. Fibre reinforced and flexible cement based mortar used for the application of various types of thermal insulating boards such as EPS, XPS and MW. Fibre reinforced. Excellent adhesion. High permeability to water vapour and high impact resistance.</p>	<p>Practical coverage - bonding: 3,5-4,5 kg/m² Practical coverage - rendering: 4-5 kg/m² for 3-5 mm thickness. White powder. Use interior/exterior. Part of the External Thermal Insulation Composite System (ETICS) JUNOTherm®.</p> <p>CE ADHESION PERMEABILITY</p> <p>25 kg</p> <p><input type="checkbox"/> White (77.600)</p>

Colourants, Paint Stripper, additives, etc.

<p>COLOURANT</p> 	<p>Universal concentrated colourant. For interior and exterior use. Note: Vermilion red and Lemon yellow colourants are for interior use only.</p>	<p>Recommended for colouring all kinds of paint. The proportion of colourant in the paint should not exceed 3%.</p> <p>1 l 100 ml</p> <p> <input type="checkbox"/> Lemon yellow* (79.404) <input type="checkbox"/> Black* (79.400) <input type="checkbox"/> Ochre yellow* (79.406) <input type="checkbox"/> Vermilion red* (79.402) <input type="checkbox"/> Blue* (79.401) <input type="checkbox"/> Oxide red* (79.403) <input type="checkbox"/> Shadow brown* (79.407) <input type="checkbox"/> Green* (79.405) </p>
---	---	---

<p>JUNO PAINT STRIPPER</p> 	<p>High performance, quick action paint stripper. Formulated with special solvents, free of methylene chloride. For interior and exterior use.</p>	<p>Recommended for quickly and conveniently removing most paints, enamels and varnishes. Its action is based on penetration between the paint film and the substrate, breaking the adhesion between both.</p>
<p>MISKY-MISKY <i>Fungicidal additive</i></p> 	<p>Fungicidal concentrate to protect decorative finishes from future mould attack. Formulated with heterocyclics, developing an intense prolonged broad spectrum action against moulds and algae. Add at least one (100 ml) bottle to 15 litres of paint and stir or shake until product has been distributed and mixed evenly with the paint.</p>	<p>Recommended as an additive to be mixed into emulsion paint, primer, undercoat, varnish, gloss, wallpaper paste, textured paint or tile adhesive to prevent the formation of mould.</p>
<p>ANTI-SLIP MICROBEADS</p> 	<p>Anti-slip microbeads for floor coatings. Polypropylene microbeads with average diameter of 180 microns to improve the slip resistance of floor surfaces particularly when wet. Add a 150 gram tub for every 4L of paint, and 4 tubs for every 15 L of paint to achieve certified anti-slip protection.</p>	<p>This product gives the following product range from JUNO Class 3 Anti-slip rating: Dynapok agua Floor Epoxy (07.1....), Dynamol (09.5....), Junosol (06.1....), Pavimyc (07.8....), Junoretano (88.8....), and Junopoxi (88.8....).</p>
<p>MICROBEADS FOR PAVIMYC HB 2/C</p> 	<p>Anti-slip microbeads for epoxy high-build floor coating systems. Polyethylene microbeads with an average diameter of 250 microns suitable for obtaining non-slip properties on wet surfaces.</p>	<p>Recommended as an anti-slip additive to obtain class 3 slip resistance in Pavimyc HB 2/C systems. Add a can of 400 grams for every 20 kg of paint.</p>
<p>JUNOCLEAN</p> 	<p>JUNOCLEAN cleans interior and exterior mould and mildew stains fast. Sprayable for easy application. For interior and exterior use. Cleans stains fast and efficiently.</p>	<p>Ideal for use on masonry, brick, tiles, vinyl siding, wood, grout or other materials. Also ideal for kitchens, bathrooms and other spaces where organic dirt, mould and humidity is a problem. Available in larger packs upon request. Ask in-store for more information.</p>

4 l 750 ml 375 ml

☒ Clear (83.100)

100 ml

☐ Blanco (79.597)

150 gr

☐ White (07.250)

400 gr

☐ Blanco (07.251)

500 ml

☒ Clear (760.180)

Thinners & Cleaners

20 l 5 l 1 l 500 ml

D-16 <i>White spirit</i>	Mineral thinner for synthetic products. Code (50.012)
D-17 <i>Quick drying</i>	Thinner for synthetic enamels and primers. Code (50.004)
D-40 <i>Chlorinated rubber</i>	Thinner for chlorinated rubber and pliolite enamels. Code (50.000)
D-45 <i>Universal</i>	Universal thinner. Code (50.017)
D-47 <i>Multi-purpose</i>	Thinner for professional use (cleaning). Code (50.019)
D-69 <i>Odourless</i>	Thinner for odourless stain block. Code (50.073)
D-70 <i>Polyurethane</i>	Thinner for polyurethane enamels and varnishes. Code (50.007)
D-71 <i>PU Retardant</i>	Retardant for Polyurethane enamels and varnishes. Code (50.014)
D-75 <i>Retardant</i>	Retardant Thinner. Code (50.107)
D-90 <i>Epoxy</i>	Thinner for epoxy enamels. Code (50.010)

Colour Cards

1 unit

















NCS	NCS 980 - JUNO colour selection fan deck (Code 999.651)
RAL	RAL - JUNO colour selection fan deck (Code 999.631)
JUNO COMBINA	COMBINA FAN DECK (Code 999.650) COMBINA COLOUR CARD (Code 999.632) POS RETAIL COMBINA COLOURS STAND (Code 999.667)
EXTERIOR FAÇADES	FAÇADE COLOURS FAN DECK (Code 999.675) FAÇADE COLOURS COLOUR CARD (Code 999.628) POS RETAIL FAÇADES COLOUR STAND (Code 999.666)
COLOUR CARDS	JUNO colour cards 1 unit JUNOKRIL Colour Card (999.636) BIKRIL / LUNA Colour Card (999.620) JUNOREV CHART (999.626) JUNOTINTE Colour Card (999.623) FLOOR RANGE (999.635) LASUR Colour Card (999.624) JUNOLAC ANTI-OX Colour CARD (999.625) OXIFORJA Colour Card (999.629) JUNOPLUS Colour Card (999.627) JUNODECO Colour Card (999.621) WATERPROOFING Colour Card (999.721) AQUALAC Colour Card (999.724)

Supplementary products




- ▮ Special exterior coatings
- ▮ Special interior coatings
- ▮ Water-based 2-pack Polyurethane
- ▮ Sealers and primers
- ▮ Thinners
- ▮ Varnish
- ▮ Tinting System

Special exterior coatings

Water-based

<p>SILOX Matt finish</p> 	<p>Siloxane-based paint with excellent resistance to weathering. With anti-mould protection. Paint with polysiloxane resins that provide high hydrophobicity. For exterior use. Cleaning and dilution with water.</p> <p> EPD THE INTERNATIONAL EPD SYSTEM</p>	<p>Recommended for painting and decorating façades where a matt finish is required. Resistant to rain water, permeable to water vapour and resistant to ultraviolet rays and the formation of mould.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.</i></p> <p></p> <p>15 l</p>
<p>JAKRILEN A-50 Matt finish</p> 	<p>High performance water-based paint. With anti-mould protection. Formulated with acrylic copolymers in aqueous dispersion. For interior and exterior use. Cleaning and dilution with water.</p> <p> EPD THE INTERNATIONAL EPD SYSTEM</p>	<p>Recommended for all types of constructions and ornaments.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.</i></p> <p></p> <p>15 l 4 l</p>
<p>JUNOSIL SILICONE BASED PLASTIC PAINT Matt finish</p> 	<p>Silicone water-based paint. Paint with acrylic copolymers and silicone additives. For interior and exterior use. Cleaning and dilution with water.</p> <p> EPD THE INTERNATIONAL EPD SYSTEM</p>	<p>Particularly recommended for painting and decorating surfaces coated with lime renders thanks to its excellent whiteness and opacity.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.</i></p> <p></p> <p>15 l</p>
<p>A-4000 Matt finish</p> 	<p>Water-based paint. Formulated with copolymers in aqueous emulsion, with an anti-dust effect and matt finish. For interior and protected exterior use. Cleaning and dilution with water.</p> <p> EPD THE INTERNATIONAL EPD SYSTEM</p> <p>  Product subject to availability. Variations in colours between batches may occur.</p>	<p>Recommended for walls, bridges, tunnels, warehouses or car parks where a quality matt finish is required.</p> <p>15 l</p>
<p>MEDITERRANEAN FAÇADES Matt finish</p> 	<p>High-build water-based masonry coating. Formulated with acrylic-styrene copolymers. For interior and exterior use. Cleaning and dilution with water.</p> <p> EPD THE INTERNATIONAL EPD SYSTEM</p>	<p>Recommended for use outdoors in mild climates and for decorating warehouses, staircases, garages and places where a high build finish is required. Allows for fine stippling interior spaces.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.</i></p> <p></p> <p>15 l 4 l</p>

Masonry coating

<p>MEDITERRANEAN FAÇADES Matt finish</p> 	<p>High-build water-based masonry coating. Formulated with acrylic-styrene copolymers. For interior and exterior use. Cleaning and dilution with water.</p> <p> EPD THE INTERNATIONAL EPD SYSTEM</p>	<p>Recommended for use outdoors in mild climates and for decorating warehouses, staircases, garages and places where a high build finish is required. Allows for fine stippling interior spaces.</p> <p><i>APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.</i></p> <p></p> <p>15 l 4 l</p>
---	---	--

Special interior coating

ANTI-CONDENSATION Matt finish



Water-based special anti-condensation paint. With anti-mould protection.

Formulated with acrylic copolymers and glass beads which prevent water condensation and mould growth on its surface.

For interior use.

Ready to use. Do not dilute.

Specifically designed to significantly reduce condensation on walls and ceilings in humid environments - by preventing condensation mould will not grow.

Ideal for use in bathrooms, kitchens, pantries, north facing rooms with poor insulation, roller shutter boxes, fitted wardrobes, computer rooms, etc. Also ideal for painting cold-water pipes.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Conductivity certificate.



CONDUCTIVITY

15 l

4 l

750 ml

☐ White / Matt finish (62.650)

Specialty Paints

J-35 EXTRA MATT Extra-matt finish



Extra-matt emulsion with added opacity. With anti-mould protection.

Formulated with acrylic copolymers with extra-matt finish. High quality, no splash application, and excellent levelling properties.

Great washability.

For interior use.

Cleaning and dilution with water.

Ideal for ceilings, workshops, warehouses, hallways, and large spaces where a completely matted finish is required.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.



FIRE RETARDANT
B-s1,d0

15 l

4 l

☐ White / Extra matt finish (72.205)

B-7 BLACK Matt finish



High quality water-based emulsion.

Formulated with acrylic copolymers and selected black pigments that provide a deep black finish.

For interior use.

Cleaning and dilution with water.

Recommended for decorating homes, designer spaces, etc.

Provides excellent hiding power and is very resistant to wet rubbing and scuffing.

APPROVAL CERTIFICATES: Fire retardant to B-s1,d0 standard.



FIRE RETARDANT
B-s1,d0

15 l

4 l

☒ Black / Matt finish* (72.101)

COVERFIX Matt finish



Elastomeric matt paint special for joints and cracks.

Formulated with acrylic copolymers and elastomeric resins for withstanding movements in weak and exposed surfaces such as plaster, gypsum, etc.

Great filling power, and good coverage.

Matt crack-bridging finish that conceals joints and splices. For interior use.

Cleaning and dilution with water.

Designed to withstand movement on plaster, gypsum and filler surfaces which are prone to cracking with time. Ideal to go over new-builds before handover.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Fire retardant to B-s1,d0 standard.



FIRE RETARDANT
B-s1,d0

15 l

4 l

☐ White / Matt finish (62.875)

Water-based 2-pack Polyurethane

AQUAPUR 2/C

Gloss finish / Satin finish



Two-pack water-based polyurethane coating.

Formulated based on polyurethane resins offering hard and resistant surfaces. Excellent levelling and resistance to rubbing. Robust weather resistant finish for exterior use.

Good flexibility and easy application.

Quick drying.

Interior and exterior use.

Cleaning and dilution with water.



For use on properly primed wood and metal surfaces. Recommended for all types of surfaces, especially wood carpentry such as kitchens, doors, window trims, skirting boards, etc. and for perfect smooth finishes on walls.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration) - Meets health related evaluation procedure for emissions of VOCs AgBB 2018 - A+ Certified - Fire retardant to B-s1,d0 standard.



15 l

4 l

☐ White / Gloss (08.310)

☐ White / Satin finish (08.315)

Sealers and primers

Sealers

QUICK DRYING STAIN BLOCK

Matt finish



Synthetic matt stain block with special resins.

Interior use.

Cleaning and dilution with Universal thinner D-45 (Code 50.017).

Recommended for all types of surfaces that have damp, grease, nicotine or other stains, or surfaces that have lost their hue. May be used as a quick drying primer for porous substrates or as a sealer/stain blocker. Seals porous surfaces with excellent enamel holdout.

15 l

4 l

750 ml

☐ White / Matt finish (21.380)

Synthetic primer

“R” PRIMER

Matt finish



Economic synthetic primer.

Formulated with alkyd resins and iron oxides providing high opacity.

For interior and exterior use.

Cleaning and dilution with “Dilution for “R” primer” (Code 50.090).

Recommended for preparing ferrous surfaces, where an economic paint system is required.

Product subject to availability. Possibility of difference in colour/sheen between production batches.

15 l

4 l

☒ Grey / Matt finish* (22.119)

Thinners

DILUTION FOR “R” PRIMER

Dilution for “R” primer and cleaner thinner for synthetic products.

Product subject to availability.

20 l

5 l

Code (50.090)

Varnish

ANTI-GRAFFITI COATING

Gloss finish / Satin finish



Two-pack clear aliphatic polyurethane gloss coating.

Cleaning and dilution with Polyurethane Thinner D-70

(Code 50.007).

For interior and exterior use.



Recommended for facilitating the removal of graffiti by cleaning.

Other uses: coating indoor concrete floors, coating metal surfaces and for those places where a high quality gloss finish is required.

APPROVAL CERTIFICATES: EPD (Certified with Environmental Product Declaration).

4 l

☐ Clear / Gloss finish (44.270)

☐ Clear / Satin finish (44.271)

New

AQUAPUR PU VARNISH 2/C

Gloss / Satin / Matt finish



Two-pack water-based polyurethane varnish.

Provides a tough clear film finish with great chemical and wear/abrasion resistance and easy cleaning. Great hardness. Quick drying. Easy application.

Interior use.

Cleaning and thinning with water.

Recommended for all types of parquet and wooden surfaces.

Also indicated as sealing and protection layer on 100% solids epoxy systems. (PAVIMYC HB flooring systems).

15 l

4 l

☐ Clear / Gloss finish (82.485)

☐ Clear / Satin finish (82.486)

☐ Clear / Matt finish (82.487)

Tinting System

Colourants for Tinting System

JUNOMATIC

Colourant



Colourants for JUNO's Tintometric System.

Decorative Tintometric System

! Colourants for JUNOMALTE and JUNOPROF bases

1 l

☐ JS / Black (88.700)

☐ LS / Blue (88.701)

☐ MS / Yellow (88.702)

☐ NS / Red (88.703)

☐ PS / Green (88.704)

☐ QS / Intense yellow (88.705)

☐ RS / Intense blue (88.706)

☐ TS / Oxide ochre (88.707)

☐ US / Orange (88.708)

☐ VS / Intense red (88.709)

☐ WS / Oxide brown (88.710)

☐ XS / Grey (88.711)

☐ YS / Oxide red (88.712)

☐ ZS / Violet (88.713)

☐ KU / Oxide white (88.714)

☐ BS / Magenta (88.715)

! Special colourants for exterior coatings

1 l

☐ HS (88.716)

☐ IS (88.717)

☐ GS (88.718)

Industrial Tintometric System

! Colourants for JUNORAPID, JUNOPOXI and JUNORETANO bases

1 l

☐ TBF / White (88.975)

☐ TAM / Oxide yellow (88.979)

☐ TEF / Oxide red (88.980)

☐ TAF / Medium yellow (88.986)

☐ TNA / Orange (89.980)

☐ TRO / Organic red (89.981)

☐ TUL / Blue (89.982)

☐ TVE / Green (89.983)

☐ TNG / Black (89.984)

☐ TMG / Magenta (89.985)

☐ TLL / Medium yellow (89.987)

JUNOMATIC Tinting System

Marketed products

- ▮ Intumescent paints
- ▮ Liquid polyurethane membrane

Intumescent paints

WIP PROMAPAIN SC3/SC4

Matt finish



Water-based reactive fire protective coating. Intumescent paint for fire protection of steel structures.

Reacts in the presence of and in contact with flames, forming an insulating foam, giving off salts with a fire fighting action.

For interior and exterior use. In exterior use finish with a proper paint

Product ready to use, do not dilute.

Cleaning with water.

Recommended for application on beams and open and closed metal sections, to provide a delay to the spread of fire of 30, 60, 90 or 120 minutes depending on the mass and microns applied.



25 kg

☐ SC3 / White (89.053)

☐ SC4 / White (89.054)

NULLIFIRE

Matt finish



Water-based insulating intumescent paint, with a high resistance to fire.

Reacts in the presence of and in contact with flames, forming an insulating intumescence, giving off salts with a fire fighting action, preventing an easy ignition of combustible materials and delaying the destruction of metal structures, maintaining their mechanical properties.

For interior and exterior use. In exterior use finish with a proper paint

Product ready to use, do not dilute.

Cleaning with water.

Recommended for application on beams and open, closed or gapped metal sections, to provide a delay to the spread of fire depending on the mass and microns applied.



25 kg

☐ SC803-90 / White (89.070)

Liquid polyurethane membrane

JUNOPRIMER- LASTIC H 2/C

Gloss finish



2-component water based epoxy primer for liquid polyurethane membrane waterproofing system.

For interior and exterior use.

Cleaning and dilution with water.

Recommended for the application of Junoelastic-K polyurethane membrane on a variety of surfaces (terraces, decking, tanks, flooring permanently exposed to humidity, etc.) or for flooring on a medium with humidity of between 4% and 10%.

18 kg

5 kg

☒ Clear (95.509)

JUNOELASTIC-K (ST)

Semi-matt finish



One component liquid waterproof aromatic polyurethane membrane.

For interior and exterior use. When used on exterior, finish with Elastipur (Code 95.525).

Dilution with solvent D-17 (Code 50.004).

Recommended for outdoor surfaces such as flat roofs and balconies. Also suitable for tanks, concrete surfaces, green roofs, flower beds, damp indoor areas (bathrooms, kitchens, etc.). Forms a uniform, elastic, waterproof, vapor-permeable sealing layer, without forming seams or joints. Excellent mechanical, chemical, thermal, UV and weather resistance properties.

25 kg



☐ Grey* (95.542)

☐ Tile* (95.543)

☐ Red* (95.544)

ELASTIPUR

Gloss finish



High performance, single component, aliphatic polyurethane resin sealer.

For interior and exterior use.

Dilution with solvent D-17 (Code 50.004).

Resistant to abrasion and wear and UV radiation.

Recommended as a finishing coat for the Junoelastic-K (ST) polyurethane membrane waterproofing system.

20 kg

4 kg

☒ Clear (95.525)

WELCOME TO OUR NEW WEBSITES

PRODUCT INFORMATION

PRODUCT DATA SHEETS


CATALOGUES

SHOP LOCATOR

SUCCESS STORIES

ETC.

NEW

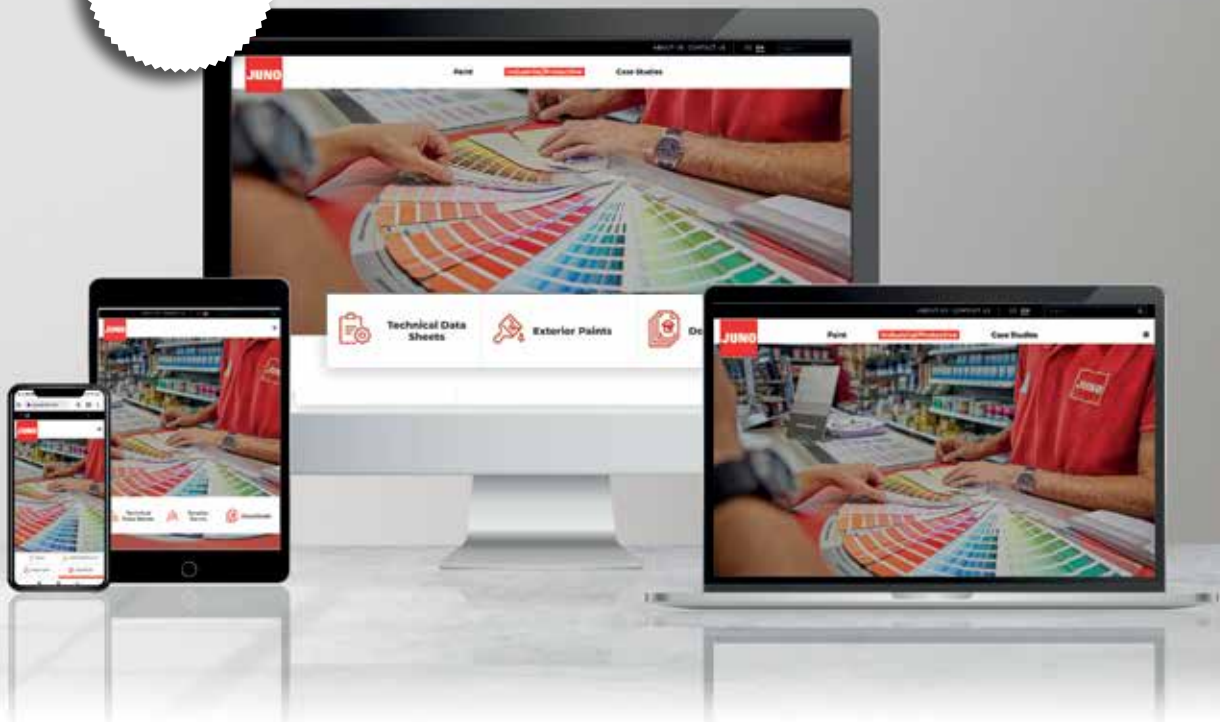

www.junopaints.com

www.junopaints.ie

JUNOTherm®

External Thermal Insulation System

The ETICS solution from the leader in Exterior paints



JUNOTherm® MRT-100

Cement-based
bonding and
rendering mortar

EVOKRIL Base

WB pigmented
acrylic base coat

EVOKRIL 0.7 / 1.5

Acrylic finishing
render anti-mould

JUNO 's prescription department will help you with your ETICS project.



1.

Follow up through all stages of ETICS implementation: before, during and after.

2.

Thermographic study of the building in question, pathology report, evaluation of building status, technical advice and training.

3.

Personalized ETICS prescription report and instructions based on diagnostics made.

CONTACT:

prescripcion@juno.es
export@juno.es
www.junopaints.com

CONTACT (IRELAND):

prescriptions@junopaints.ie
info@junopaints.ie
www.junopaints.ie



PAINT MANUFACTURERS SINCE 1927

JUNO PAINTS LTD.

Unit 1, Zone 5 Clonminam Business
Park Portlaoise, Co. Laois
R32W2RW
Phone: (+353) 057 867 0634
info@junopaints.ie
www.junopaints.ie

JUNO PAINTS DUBLIN

Unit D21 North City Business Park
North Road Dublin 11
D11 RWP8
Phone: (01) 834 1802
dublin@junopaints.ie
www.junopaints.ie

JUNO PAINTS CENTRAL HQ

Barrio Saconi, 10
48950 Erandio (Bizkaia) SPAIN
Tel.: +34 944 670 062 - Fax: +34 944 675 832
infoweb@juno.es
export@juno.es
www.junopaints.com
www.juno.es